



Erosion™ • Valley 12" x 24"



FLOOR TILE

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Path



Route




Tour



Voyage

Mosaics



Path



Route



Tour



Voyage

Sizes							
	24"x47" 23.62"x47.24"	12"x24" 11.81"x23.62"	12"x12" Mesh 11.73"x11.73"	3"x12" Floor SBN			
Thickness	10mm	10mm	10mm	10mm			
Faces	4	16	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Rectified	Rectified	Cut	Cut			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥425 lbf	Resistant	<0.5%	>0.50	6	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Access II™ brings the classic aesthetic of sandstone to life through dynamic patterning. High-definition swathes of color shift across the tile for visual movement. Cool tones in a matte finish lend an approachable sense of modernity.

# ACCESS II™

*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR



Advance



Cue

Sizes							
	11" x 23" 11.41" x 23.23"	3" x 23" Floor SBN					
Thickness	10mm	10mm					
Faces	24	N/A					
Finish	Polished	Polished					
Edge	Rectified	Cut/Rounded					
Grout Joint Recommendation	1/8"	5/64"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* V	>500 lbf	Resistant	≤.50%	<0.42	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Action™ uses high-definition printing to recreate veincut marble in a modern color palette with a beautiful polished finish. All colors are available in a matte finish in our Motion™ series.

**ACTION™**  
*Glazed Body Match Porcelain*



FLOOR / WALL  RESIDENTIAL  INDOOR 



Bosco




Foresta



Pianta



Ramo

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 24" 795" x 2370"						
	8.6mm						
	8						
	Matte						
	Pressed						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	III	<250 lbf	Not Resistant	>7.0%	>0.45	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Albero™ skillfully incorporates the visual features of wood in glazed ceramic tile. Bringing to life the warmth and cozy feeling of natural wood, it is offered in natural earthy colors and a standard wood plank size.

# ALBERO™

*Glazed Ceramic*





Apex



Cliff



Crest

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	10.5mm						
	18						
	Matte						
	Pressed						
	3/16"						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	III	≥300 lbf	Resistant	≤0.50%	≥0.60	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Angeles™ celebrates the beauty of nature using high-definition graphic technology to mimic the unique gradations and variances found in natural wood.

# ANGELES™


*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White

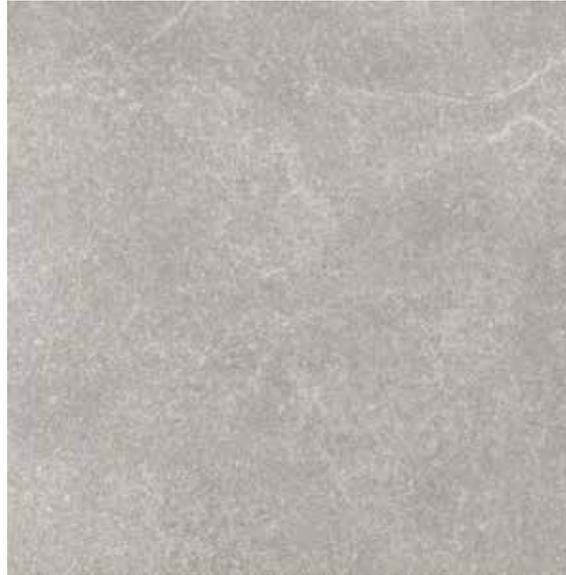

Gray

Mosaics



White



Gray

Sizes							
	18"x18" 17.60"x17.60"	13"x23" 12.68"x22.56"	12"x12" 12.28"x12.28"	12"x12" Mesh 12.28"x12.28"	3"x12" Floor SBN		
Thickness	8.4mm	8.4mm	8mm	7.3mm	8.4mm		
Faces	8	8	8	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Pressed	Pressed		
Grout Joint Recommendation	3/16"	3/16"	3/16"	5/32"	5/32"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥250 lbf	Non-Resistant	>5.0%	<0.42	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Anthem™ embodies the minimalist effects of limestone with abstract movement in a durable ceramic tile. Exploring the boundaries of what limestone-like shading can evoke, Anthem's earthy tones result in a cool, contemporary surface.

# ANTHEM™

*Glazed Ceramic*



FLOOR / WALL  RESIDENTIAL  INDOOR 



Era



Memoir

Mosaics



Era



Memoir

Sizes							
	11" x 23" 11.42" x 23.23"	12" x 12" Mesh 12.01" x 12.01"	3" x 23" Floor SBN				
Thickness	9.8mm	9.8mm	9.8mm				
Faces	16	N/A	N/A				
Finish	Polished	Polished	Polished				
Edge	Rectified	Rectified	Rectified				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥350 lbf	Resistant	≤0.50%	<0.42	9	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Archive™ is inspired by the structural movement of veincut marble. Bold lines and color variation bring heightened contrast to draw in the eye. Available in a matte finish in our Chronicle™ series.

# ARCHIVE™

*Glazed Porcelain*





Ensenada



Mexicali




Rosarito



Tecate

Mexicali, Rosarito, and Tecate Available in Sizes 18"x18", 12"x24"  
 Ensenada Available in 18"x18", 14"x14", 12"x24"


Mosaics




Ensenada



Mexicali



Rosarito



Tecate

Sizes							
	18"x18" 17.72"x17.72"	14"x14" 13.78"x13.78"	12"x24" 12.01"x23.86"	13"x13" Mesh 12.99"x12.99"	3"x13" SBN Ensenada Only		
Thickness	8.3-9.0mm	8.0-8.5mm	9.1-9.5mm	8.5mm	8.5mm		
Faces	5	4	8	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	≥250 lbf	Resistant	≤7%	≥0.42	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.




 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free


\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Baja™ brings the simple elegance of natural limestone in a ceramic tile. A universally appealing color palette and varied sizes offers numerous design opportunities.

**BAJA™**  
*Glazed Ceramic*

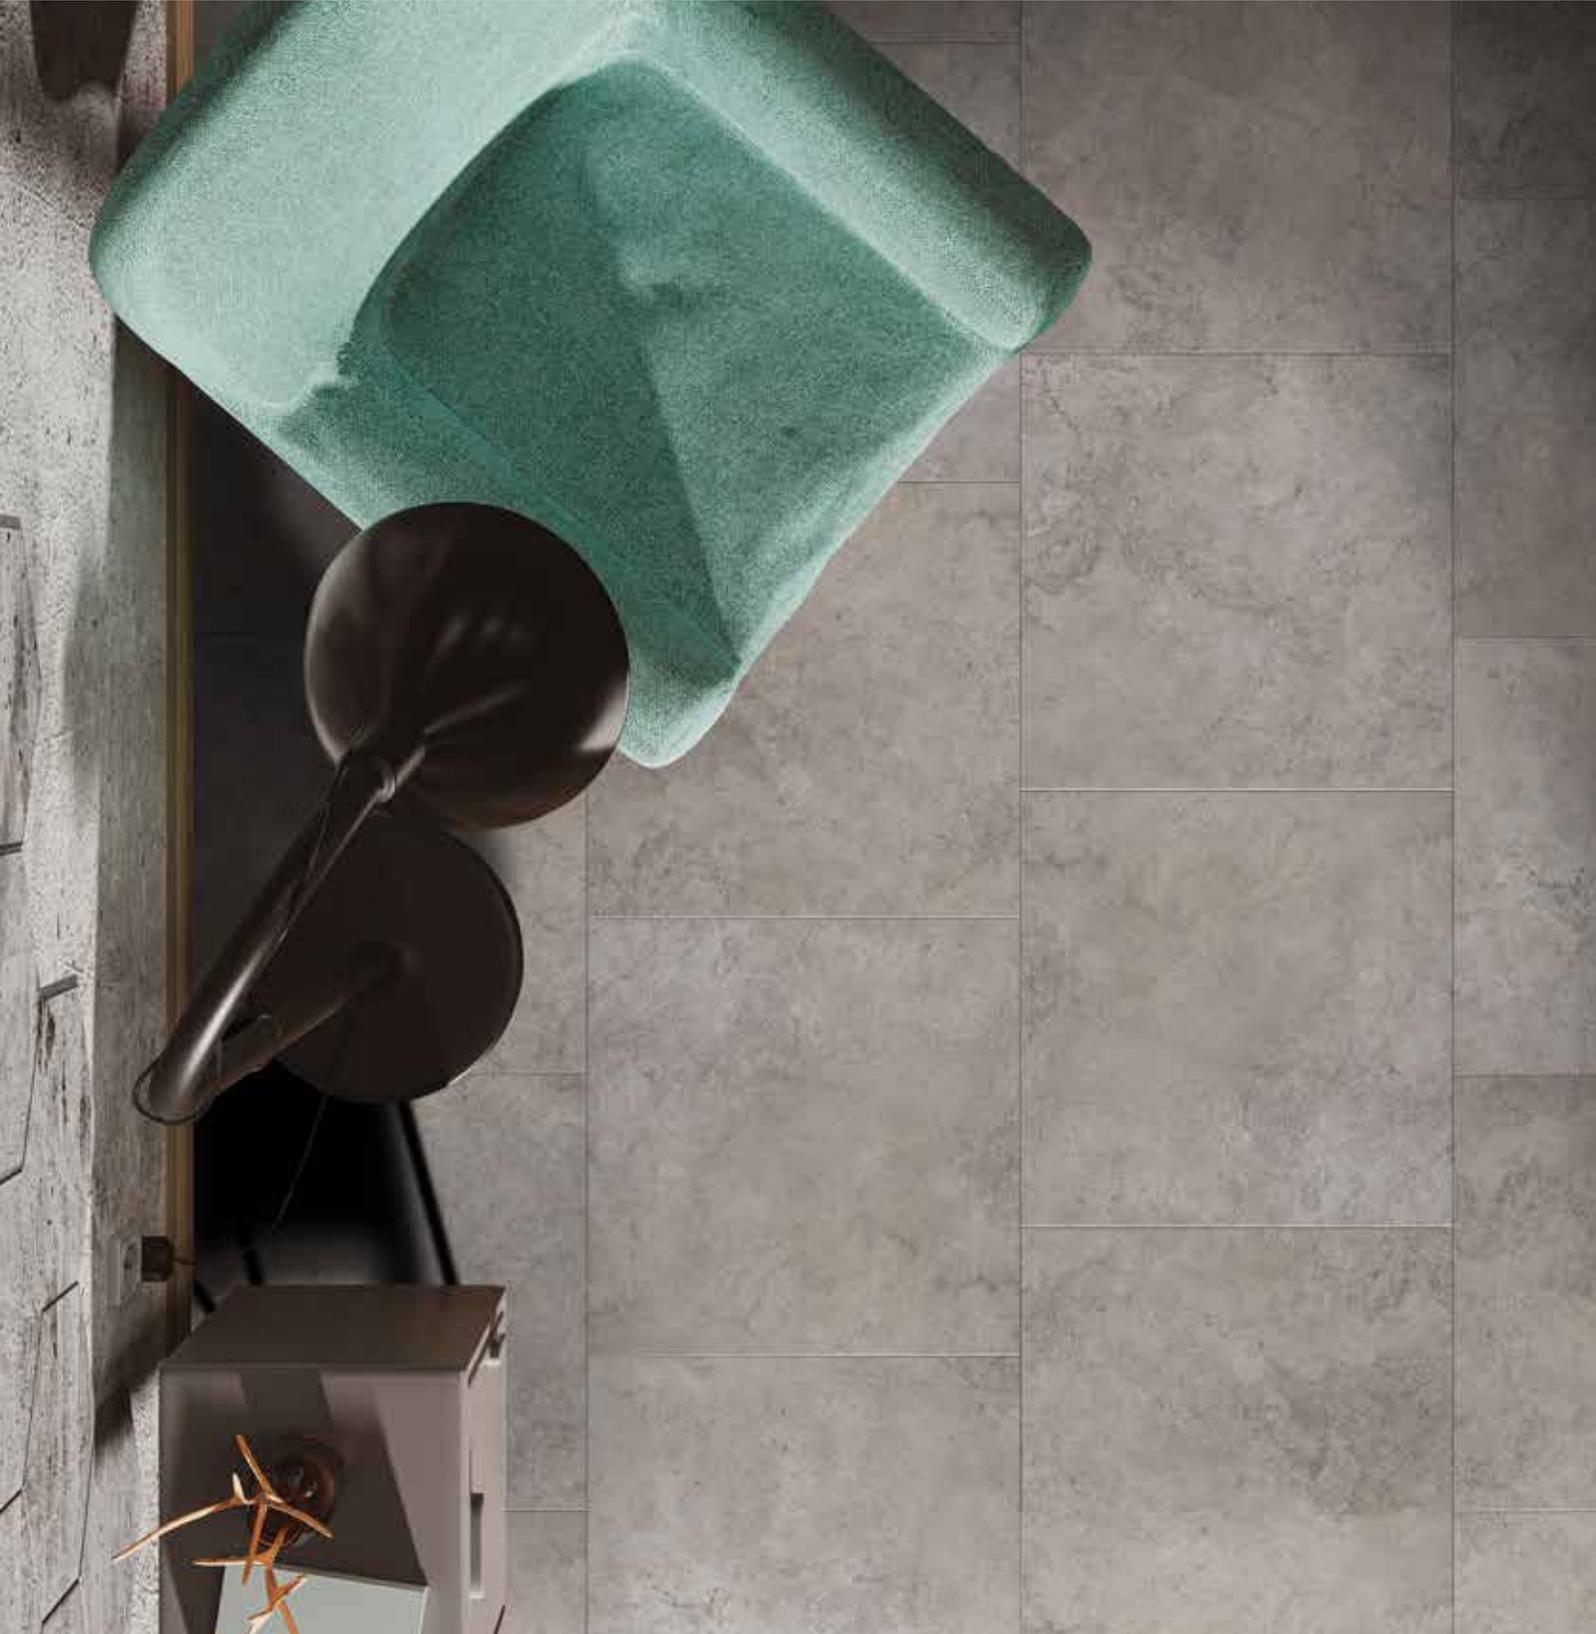

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 

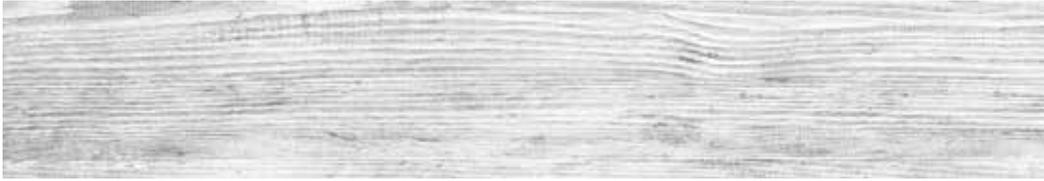

Ardor



Fervor



Honor



Rigor



Valor

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	6" x 35" 5.91" x 35.43"						
	10mm						
	10						
	Matte						
Pressed							
3/16"							
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	III IV (Ardor)	>250 lbf	Resistant	<0.5%	>0.60	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Banzai™ porcelain tile features the highly coveted wood look perfect for those who love design – from modern to classic cottage, and all styles in-between. Banzai is available in 6" x 35" planks with five wood-looks.


**BANZAI™**  
*Glazed Porcelain*




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White

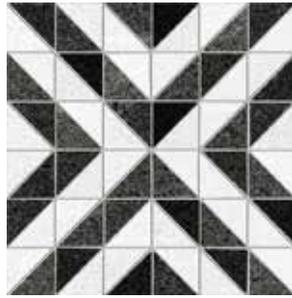

Croix

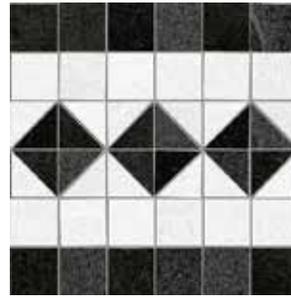

Krix



Krix Corner



White



Silver




Gray



Arrow



Floral

Sizes							
	8" x 8" 7.87" x 7.87"	9" x 10" 9.06" x 10.47"					
Thickness	8mm	9mm					
Faces	10	10 15 (Floral)					
Finish	Matte	Matte					
Edge	Rectified	Pressed					
Grout Joint Recommendation	1/8"	1/8"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>350 lbf (8x8) >375 lbf (Hex)	Resistant	<0.50%	>0.55 (8x8) >0.60 (Hex)	6	V2



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free


\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Bauhaus honors a design movement that continues to inspire today. The collection stresses the inherent beauty in geometry and simplicity, as well as the importance of quality materials. Subtle color gradations draw the eye and create a unique visual experience, whether on walls or on floors.

# BAUHAUS

*Glazed Porcelain*



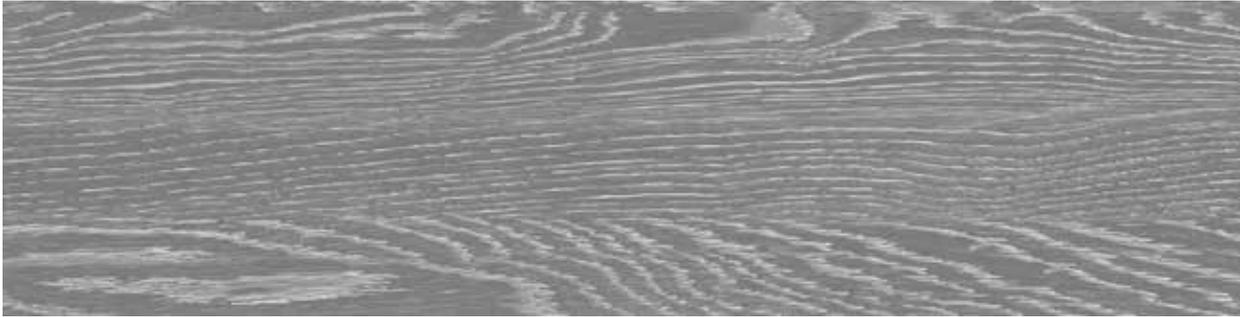

Erie



Nasser



Tahoe

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 34" 8.15" x 34.17"						
	10mm						
	20						
	Matte						
	Rectified						
1/8"							
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	≥550 lbf	Resistant	≤0.50%	≥0.55	7	V4

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 5% Pre-Consumer and 3% Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Beach Wood™ breathes life into contemporary surfaces in the form of wood look panels. Beach Wood™ consists of distinct wooden tones which evoke rich detail and texture across a variety of faces.

# BEACH WOOD

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Beige



Taupe



Honey

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	6" x 24" 5.91" x 23.62"						
	8mm						
	9						
	Matte						
	Pressed						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	III	>350 lbf	Resistant	<0.50%	>0.55	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



The Beckway™ series provides the classic look of wood with the ease of care that only porcelain tile can provide. With a neutral color palette reminiscent of the finest woods, Beckway is perfect for traditional and modern settings. Available in a 6"x24" size, this natural looking wood tile is sure to bring life to any room.

# BECKWAY™

*Glazed Porcelain*




FLOOR / WALL  RESIDENTIAL  INDOOR 



White



Sand

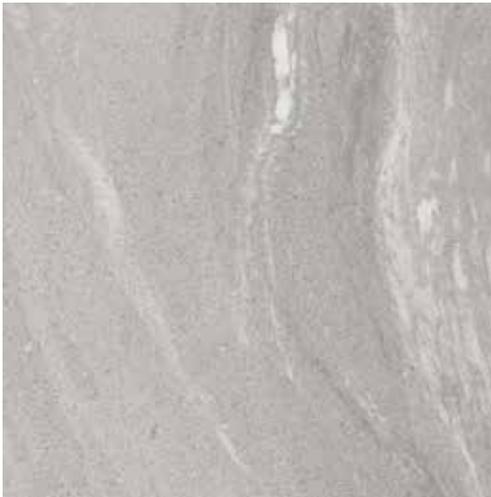

Gray

Sizes							
	16" x 16" 15.87" x 15.87"	12" x 12" Mesh	3" x 16" Floor SBN				
Thickness	8,5mm	8,5mm	8,5mm				
Faces	9	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V3

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Simplicity meets style. Subtly reminiscent of the layered look associated with sandstone, Belstar™ ceramic tile breathes elegance into installations. Well-loved neutrals in both warm and cool tones strike the right balance with variation in both color and texture.

**BELSTAR™**  
*Glazed Ceramic*

FLOOR / WALL  RESIDENTIAL  INDOOR 



White



Ivory



Silver

Sizes							
	16" x 16" 15.87" x 15.87"	12" x 24"	12" x 12" Mesh	3" x 12" Floor SBN			
Thickness	8.5mm	8.5mm	Check Website	Check Website			
Faces	12	8	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V2

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Modern luxury comes alive with the stone look of Borgata™ ceramic tile. Designed for use on both floors and walls, the elegance of shading and veining is front and center with this collection of neutrals. Available in two sizes and three neutral colors, Borgata makes a statement reality.

# BORGATA™

*Glazed Ceramic*

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White




Beige



Gray



Black

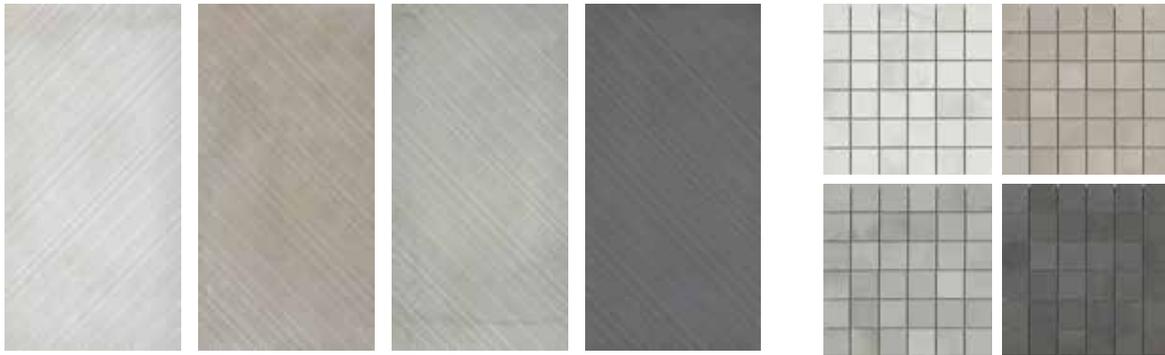

Diagonal Pattern Available in 18"x35" Only | Left & Right Styles Available

Sizes							
	35" x 35" 35.24" x 35.24"	18" x 35" 17.54" x 35.15"	12" x 23" 11.67" x 23.43"	12" x 12" Mesh 11.81" x 11.81"	3" x 12" Floor SBN	6" x 12" Cove Base	1" x 6" Cove Base Corner Out
Thickness	10mm	10mm	10mm	10mm	10mm	8.9mm	8.5mm
Faces	10	20	20	N/A	N/A	N/A	N/A
Finish	Matte						
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded	Pressed	Rectified
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥250 lbf	Resistant	≤0.50%	>0.55	5	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Borigni™ is a glazed body match porcelain with an industrial, urban aesthetic. Replicating the look of concrete in a variety of sizes, patterns and mosaics, Borigni™ provides a seamless look indoors to outdoors.

# BORIGNI™

*Glazed Body Match Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Ivory



Taupe



Brown




Silver



Carbon

Mosaics



Ivory

Taupe

Brown

Silver

Carbon

Sizes							
	13"x13" 13.11"x13.11"	12"x24" 11.81"x23.62"	13"x13" Mesh	13"x13" Mesh	3"x13" Floor SBN		
Thickness	8.5mm	10mm	8.5mm	8.5mm	8.5mm		
Faces	17	11	N/A	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Cut	Cut	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>325 lbf	Resistant	<0.50%	>0.45	8	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Brava™ artfully brings to life the texture and feel of slate in durable glazed porcelain. Offered in multiple sizes and colors to complete any project.

**BRAVA™**  
*Glazed Porcelain*





Cotto




White



Silver



Gray

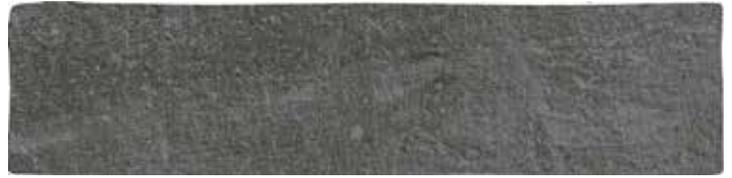

Charcoal

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>	<div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> <p>2" x 10" 2,36" x 9,84"</p>						
	8mm						
	24						
	Matte						
	Pressed						
	3/16"						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	Check Website	>400 lbf	Resistant	<0.50%	>0.65	6	V4

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

What do you get when you take one of the world's oldest and humblest building materials and elevate it? Brique™! Consider for a statement wall in your kitchen or a durable statement floor sure to get compliments. Colors come in both cool and warm tones encouraging options for all tastes.

# BRIQUE™

*Glazed Porcelain*





White



Silver



Cream



Graphite

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	18" x 18" 17.72" x 17.72"	14" x 14" 13.78" x 13.78"	12" x 24" 12.01" x 23.86"				
	8.3-9.0mm	8.1-8.5mm	8.8-9.2mm				
	12	24	16				
	Matte	Matte	Matte				
	Pressed	Pressed	Pressed				
	3/16"	3/16"	3/16"				
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	Graphite: II Silver, Cream: III White: IV	>250 lbf	Resistant	3.0-7.0%	>0.42	6	V4

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Brook™ features the subtle and calming movement of a flowing river. The four earthy shades and three standard sizes provides endless design opportunities. The timeless and versatile design is sure to enhance any space.

**BROOK™**  
*Glazed Ceramic*





Black



Gray



Silver



Mist

Sizes							
	29" x 29" 29.39" x 29.39"	24" x 47" 23.5" x 47.09"	15" x 29" 14.65" x 29.39"	12" x 24" 11.71" x 23.5"			
Thickness	10mm	10mm	10mm	10mm			
Faces	16	8	32	32			
Finish	Matte	Matte	Matte	Matte			
Edge	Rectified	Rectified	Rectified	Rectified			
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>700 lbf	Resistant	<0.50%	>0.60	5	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



The Building Blocks™ Concrete line beautifully replicates the contemporary look of concrete while bringing in an added layer of warmth and sophistication. Designed to blend perfectly with other Building Blocks™ products, as well as the Back to Basics™ collection, this line provides endless design possibilities.

## BUILDING BLOCKS™ CONCRETE

*Glazed Body Match Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Steel



Black



Bronze

Sizes							
	24" x 47" 23.54" x 47.17"	12" x 24" 11.73" x 23.54"					
Thickness	8.8mm	8.8mm					
Faces	12	48					
Finish	Matte	Matte					
Edge	Rectified	Rectified					
Grout Joint Recommendation	1/16"	1/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	>500 lbf	Resistant	<0.50%	>0.60	6	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



The Building Blocks™ Metal line strikes a harmonious balance between industrial chic and modern luxury. The rich colors are reminiscent of iron, bronze and steel and provide sophisticated elegance to any application. This porcelain tile is sure to bring any room to life.

## BUILDING BLOCKS™ METAL

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



White



Sand



Gray

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 47" 778" x 479"						
	10mm						
	40						
	Matte						
	Rectified						
3/16"							
<b>Testing</b>	Abrasion Resistance <small>C1027</small>	Breaking Strength <small>C648</small>	Chemical Resistance <small>C650</small>	Water Absorption <small>C373</small>	DCOF ANSI <small>A1371</small>	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	>650 lbf	Resistant	<0.50%	>0.50	6	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free



\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

The Building Blocks™ Wood line provides the warmth and sophistication of wood in a durable porcelain tile. Designed to blend perfectly with other Building Blocks™ products, this line provides a stylized re-creation of natural elements that create a harmonious blend of textures and sizes.

# BUILDING BLOCKS™ WOOD | OAK

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  INDOOR  OUTDOOR 



Black



Navy



Charcoal



Silver



Ivory

Sizes Thickness Faces Finish Edge Grout Joint Recommendation							
	8" x 4 7/8" 7 7/8" x 4 6 8/5"						
	10mm						
	36						
	Matte						
	Rectified						
3/16"							
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	II	>700 lbf	Resistant	<0.50%	>0.50	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joint patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Yakedo™ replicates the sophisticated aesthetic of burnt cedar in a durable glazed porcelain plank tile. Based on the Shou Sugi Ban technique, or slight burning before installation, the worn textures create a certain dimension and strength. The way in which it reflects light from its crackled texture brings sophisticated movement and visual intrigue to interiors.

## BUILDING BLOCKS™ WOOD | YAKEDO™

*Glazed Body Match Porcelain*





Denali



Sequoia



Yosemite



Zion

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	6" x 24" 5.91" x 23.62"						
	9mm						
	6						
	Matte						
	Pressed						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	>375 lbf	Resistant	<0.50%	>0.45	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Cabin™ beautifully replicates the subtle look of wood in durable glazed porcelain tile. Offered in neutral earthy colors to compliment your space.

**CABIN™**  
*Glazed Porcelain*



FLOOR / WALL 

RESIDENTIAL 

COMMERCIAL 

INDOOR 



Shore



Coast



Ocean

Mosaics



Shore



Coast



Ocean

Sizes							
	17" x 17" 17.26" x 17.26"	13" x 13" 12.99" x 12.99"	12" x 24"	13" x 13" Mesh 13.11" x 13.11"	3" x 12" Floor SBN		
Thickness	9mm	8mm	Check Website	7.7mm	Check Website		
Faces	20	20	Check Website	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	III	>250 lbf	Resistant	>7.0%	<0.42	7

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Cabo™ features crackled, subtle movement to emulate the details of natural travertine. Colors of warm and cool neutrals reflect a relaxed, coastal feel. Varied tile sizes invite a range of applications.

CABO™  
*Glazed Ceramic*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White



Gray



Moka



Black

Sizes							
	24" x 47" 23.62" x 47.24"	12" x 24" 11.81" x 23.62"	3" x 12" Floor SBN				
Thickness	10mm	10mm	10mm				
Faces	4	16	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Rectified	Rectified				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	>450 lbf	Resistant	<0.5%	>0.55	6	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free


\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Cassero II™ offers a rustic and refined concrete linear texture in glazed porcelain. The matte finish is offered in colors complementing each other and is suitable for interior and exterior applications.

## CASSERO II™

*Glazed Porcelain*



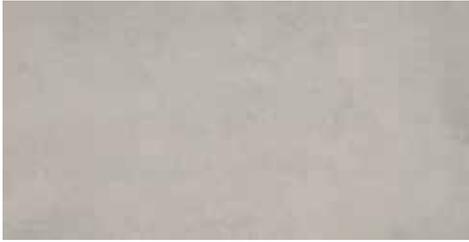

Atolia



Carson



Jerome



Kismet




Loring

Mosaics




Atolia

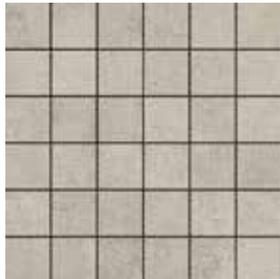


Carson



Jerome

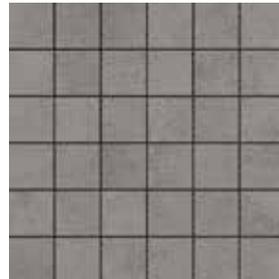

Kismet

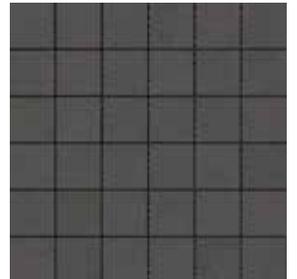

Loring

Sizes							
	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	3" x 12" Floor SBN				
Thickness	9mm	9.1mm	9mm				
Faces	12	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>250 lbf	Resistant	<0.50%	>0.60	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- 0% Pre- and Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Chiado II™ brings the subtlety of cement to new form in porcelain tile. Neutral tones result in a cool, contemporary surface to allow various applications and creative layouts.

## CHIADO II™

*Glazed Porcelain*






Era



Memoir

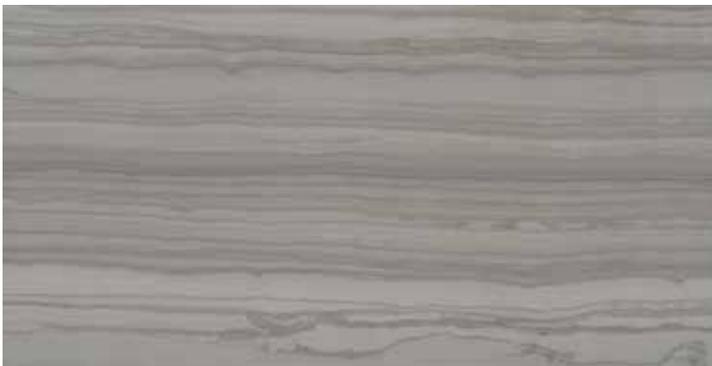

Record

Mosaics



Era



Memoir



Record

Sizes							
	12" x 24" 11.81" x 23.62"	12" x 12" Mesh 11.69" x 11.69"	3" x 24" Floor SBN				
Thickness	9.8mm	9.8mm	9.8mm				
Faces	16	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥850 lbf	Resistant	≤0.5%	≥0.60	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joint patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Chronicle™ is inspired by the universal luxury of veincut marble. Light-toned colors with high-definition variation complement any decor. Era and Memoir colors are available in a polished finish in our Archive™ series.

# CHRONICLE™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Civilian



Elector



Public



Resident



Subject

Mosaics



Civilian



Elector



Public



Resident



Subject

Sizes							
	24" x 48" 23.62" x 47.24"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	3" x 12" Floor SBN	6" x 12" Cove Base	1" x 6" Cove Base Corner Out
Thickness	10mm	10mm	10mm	10mm	10mm	10mm	10mm
Faces	12	15	30	N/A	N/A	20	20
Finish	Matte & Lappato	Matte & Lappato	Matte & Lappato	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded	Rectified	Rectified
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>500 lbf	Resistant	≤0.50%	≥0.65 (M) ≥0.50 (LP)	8	V2



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

In a return to form, Citizen™ embraces large format tiles and complementary mosaics. The timelessly classic concrete look is expressed through subtle brushed color variations of tans and grays. Visually arresting, Citizen™ achieves an unencumbered chic aesthetic on floors, walls, and a wide array of surfaces.

# CITIZEN™

*Glazed Body Match Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Ash



Cream



Taupe



Gray


Mosaics




Ash



Cream



Taupe



Gray

Sizes							
	12"x24" 11.81"x23.62"	12"x12" Mesh 11.82"x11.82"	3"x12" Floor SBN				
Thickness	10.5mm	10.3mm	10.5mm				
Faces	12	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>450 lbf	Non-Resistant	≤7.0%	≥0.42	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Ciudad™ recreates the look of natural stone in ceramic tile using high-definition printing. Its pattern variation from tile to tile is due to its striking graphic imaging, which adds a contemporary statement to any application.

**CIUDAD™**  
*Glazed Ceramic*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Dama




Oro

Mosaics



Dama

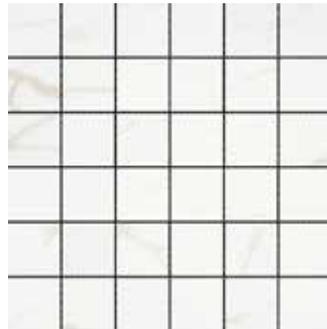

Oro



Dama



Oro

Size	24" x 24"	23" x 23"	18" x 18"	13" x 13"	12" x 24"	11" x 23"	3" x 6"	13" x 13" Mesh	Herringbone Mesh	3" x 13" Floor SBN	3" x 11" Floor SBN
Thickness	10mm	10mm	8.6mm	7.8mm	9mm	10mm	9-10mm	8.3mm	8.3mm	8.3mm	9.5mm
Faces	10	10	9	10	20	20	>100	N/A	N/A	N/A	N/A
Finish	Matte	Polished	Matte	Matte	Matte	Polished	Matte & Polished	Matte	Matte	Matte	Polished
Edge	Pressed	Rectified	Pressed	Pressed	Pressed	Rectified	Rectified	Cut	Cut	Rectified	Rectified
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	5/32"	3/16"	3/16"	3/16"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating				
Results*	IV	>350 lbf	Resistant	<0.5%	>0.50	7	V2	 <p>Recommended 33% Offset*</p>			

Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 34% Pre-Consumer and 0% Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Pure, simple, relaxing, Contessa™ is a true jewel adding timeless style to any space. Inspired by the exquisite veining in marble, this line is offered in multiple sizes

# CONTESSA™


*Glazed Porcelain*




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Bianco

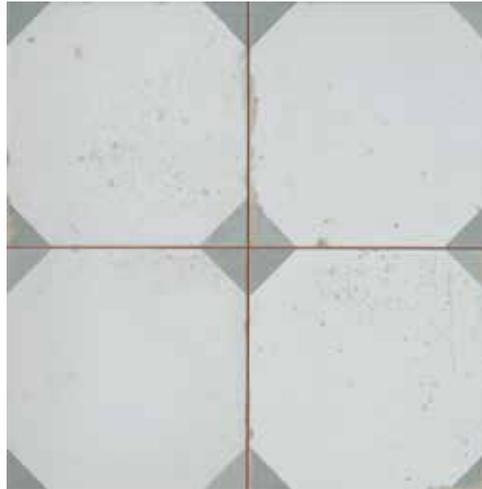

Octagon Gray

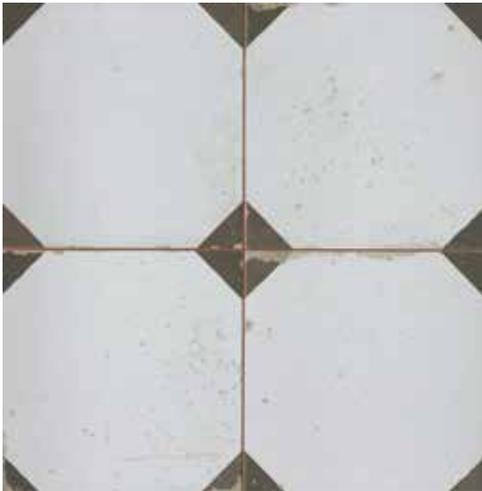

Octagon Chocolate

<b>Sizes</b>  18" x 18" 17.72" x 17.72" <b>Thickness</b> 10.5mm <b>Faces</b> 8 <b>Finish</b> Matte <b>Edge</b> Pressed <b>Grout Joint Recommendation</b> 1/16"								
	<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	<b>Results*</b>	IV	>375 lbf	Resistant	3.0-7.0%	>0.42	6	V1



Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- 7-10% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

The style and name of Cortijo™ is derived from courtyards in the south of Spain. The unique scored design of this 18x18 ceramic floor and wall tile provides the illusion of multiple tiles, but installs with the ease of one. The cool color tone and hexagon styling fits well with both traditional and contemporary designs.

# CORTIJO™

*Glazed Ceramic*




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 




Crystal



Ecreu

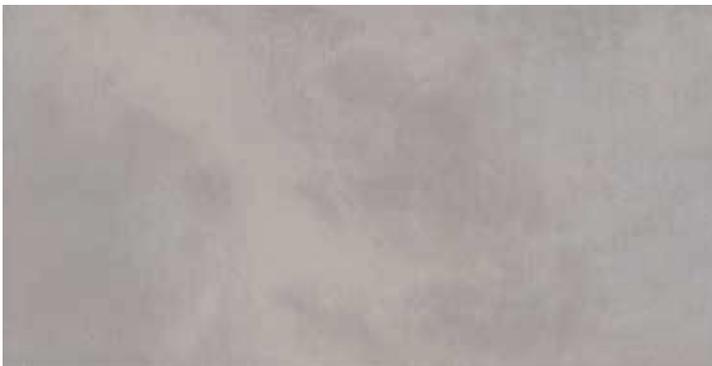

Steel

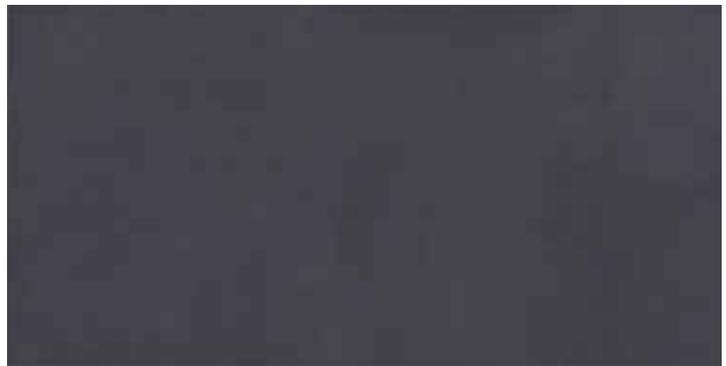


Charcoal


Mosaics



Crystal



Ecreu



Steel



Charcoal

Sizes							
	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	13" x 13" Mesh 13.07" x 13.07"	3" x 12" Floor SBN			
Thickness	9.8mm	9.8mm	7.2mm	9.8mm			
Faces	5	10	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥250 lbf	Resistant	≤0.50%	≥0.60	7	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Cosmopolitan™ is an artful recreation of brushed concrete. Rich colors elevate urban living with modern sensibility. An approachable matte finish allows the collection to complement a range of aesthetics.

# COSMOPOLITAN™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 




Ivory



Silver



Gray

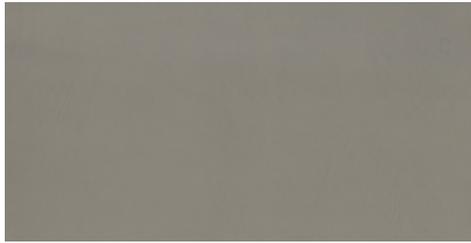

Olive



Black

Mosaics



Ivory




Silver




Gray



Olive

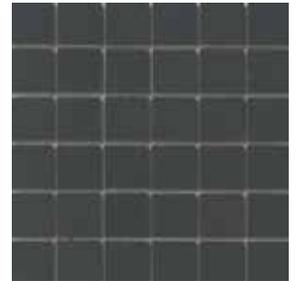

Black

Sizes							
	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh 12.28" x 12.28"	3" x 12" Floor SBN	6" x 12" Cove Base	1" x 6" Cove Base Corner Out	
Thickness	8mm	8.5mm	7.4mm	9mm	N/A	N/A	
Faces	6 2 Textures	12 3 Textures	N/A	N/A	N/A	N/A	
Finish	Matte	Matte	Matte	Matte	Matte	Matte	
Edge	Rectified	Rectified	Rectified	Cut/Rounded	Pressed	Pressed	
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>385 lbf	Resistant	<0.50%	>0.60	7	V1

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Council™ offers a modern and fashionable approach to floor and wall applications. With a nod to leather, this series is available in five cool tones that were designed to mix and match to create stunning environments.

# COUNCIL™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Atar



Nador



Tripoli



Zilla

Mosaics



Atar

Nador

Tripoli

Zilla

Sizes							
	17" x 17" 16.73" x 16.73"	13" x 13" 12.99" x 12.99"	12" x 24" 12.20" x 24.02"	13" x 13" Mesh 12.60" x 12.60"	12" x 12" Mesh 11.61" x 11.69"	3" x 13" Floor SBN	
Thickness	8.5mm	8mm	9mm	8.5mm	9.5mm	8mm	
Faces	20	20	20	N/A	N/A	N/A	
Finish	Matte	Matte	Matte	Matte	Matte	Matte	
Edge	Pressed	Pressed	Pressed	Cut	Cut	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>450 lbf	Resistant	<0.50%	>0.50	8	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Daroca™ brings the warmth of nature into a modern porcelain tile. Inspired by the look of travertine in warm and cool tones, Daroca™ is ideal for any application.

**DAROCA™**  
*Glazed Porcelain*

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Astoria



Harlem



Soho



Tribeca

Mosaics




Astoria



Harlem



Soho



Tribeca

Sizes							
	12" x 24" 12.01" x 24.02"	9" x 36" 8.96" x 36.02"	12" x 12" Mesh 11.75" x 11.75"	3" x 12" Floor SBN			
Thickness	8.2mm	9.2mm	7.8mm	8.2mm			
Faces	12	12	12	12			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Rectified	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>325 lbf	Resistant	<0.50%	>0.42	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- 40% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Denova™ replicates the look of concrete with cool tones and a brushed linear texture. Available in four colors.

# DENOVA™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Mural




Outline



Sketch



Diagram

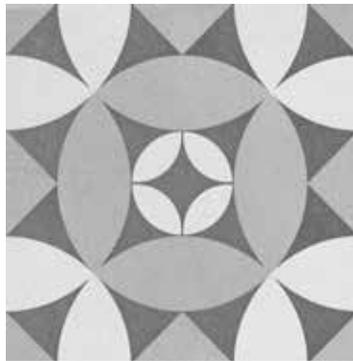

Portrait



Art



Art Faces

Art has 18 patterns, intended for random installations or accent pieces.

Sizes							
	9" x 9" 9.17" x 9.17"	9" x 9" 9.17" x 9.17"					
Thickness	8.5mm	8.5mm					
Faces	1	18 (Art)					
Finish	Matte	Matte					
Edge	Pressed	Pressed					
Grout Joint Recommendation	1/8"	1/8"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	≥700 lbf	Resistant	≤0.50%	≥0.60	7	V1

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.


Design™ is an eclectic collection of unique patterns from a distressed look with a contemporary flair to geometric patterns, offering a wide range of solutions for any space.

# DESIGN™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 

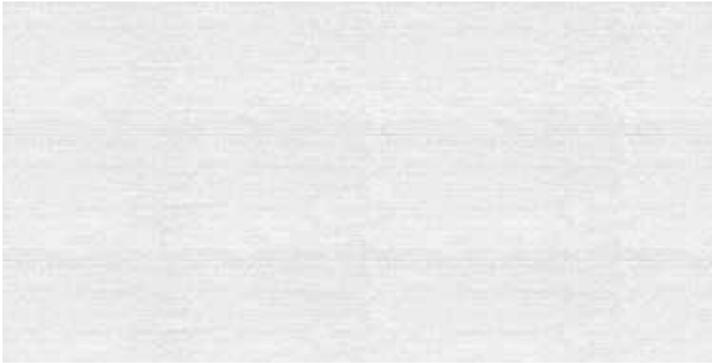

Bukhara



Orcha




Rajmata




Pattern

Mosaics



Bukhara



Orcha



Rajmata

Sizes							
	12"x23" 11.60"x23.43"	12"x12" Mesh 11.65"x11.65"	3"x12" Floor SBN				
Thickness	10mm	10mm	10mm				
Faces	18	N/A	N/A				
Finish	Matte/Textured	Matte/Textured	Matte/Textured				
Edge	Rectified	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	5/64"	5/64"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* V	≥500 lbf	Resistant	≤0.50%	≥0.45	9	V1

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content >8% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Dunham™ is inspired by the timeless look of Italian menswear. Dashing linear pattern brings geometric movement, while neutral, textured designs serve minimalist styles.

# DUNHAM™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Glacier



Rock



Valley



Wind

Mosaics



Glacier




Rock



Valley



Wind

Sizes							
	20" x 20" 19.57" x 19.57"	13" x 13" 12.99" x 12.99"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	3" x 12" Floor SBN		
Thickness	8.5mm	7.1mm	8.4mm	Check Webiste	Check Webiste		
Faces	16	20	16	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut		
Grout Joint Recommendation	3/16"	3/16"	3/16"	Check Webiste	Check Webiste		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>350 lbf (12x24, 20x20) >250 lbf (13x13)	Resistant	<0.50%	>0.55	9	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC <0.5 mg/m<sup>3</sup>
- Recycled Content 3-4% Pre-Consumer and 72% Post-Consumer for Packaging Cartons

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Earthy hues in both cool and warm tones, like those available from Erosion™ porcelain tile collection, remain the standard in interiors and exteriors. Their aesthetic appeal, coupled with the durability of tile, makes for a strong foundation in design. Available in three sizes and four colors, Erosion features the beauty found in nature.

# EROSION™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Alley



Hall



Pass



Trail

Mosaics



Alley



Hall



Pass



Trail

Sizes							
	17" x 35" 17.40" x 35.01"	12" x 24" 11.81" x 23.62"	11" x 23" 11.42" x 23.23"	12" x 12" Mesh 11.81" x 11.81"	3" x 12" (M) Floor SBN	3" x 11" (P) Floor SBN	
Thickness	11mm	9.8mm	10mm	9.8mm	9.5mm	10mm	
Faces	5	16	16	N/A	N/A	N/A	
Finish	Matte	Matte	Polished	Matte	Matte	Polished	
Edge	Rectified	Pressed	Rectified	Cut	Cut/Rounded	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥600 lbf	Resistant	≤0.50%	≥0.60	9	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Esplanade™ embodies the earthy aesthetic of travertine in a durable porcelain tile. Nuanced color variation lends a natural aesthetic. Large format and mosaic tiles allow for a range of design applications.

# ESPLANADE™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Bianco



Cafe



Chiara



Grigio



Noce

Mosaics



Bianco



Cafe




Chiara



Grigio



Noce

Sizes							
	12"x24" 11.80"x23.60"	13"x13" Mesh 12.69"x12.69"	3"x12" Floor SBN				
Thickness	9.8mm	8mm	9.8mm				
Faces	8	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* V	≥350 lbf	Resistant	≤0.50%	>0.42	7	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 1/8" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Eurasia™ interprets the dramatic design statement of imported stone through striking graphic imagery. Layered segments of tonal neutrals bring visual depth and flair. A timeless color palette allows for a range of applications.

# EURASIA™

*Glazed Porcelain*





Arabescato White



Lazio White



Onix White

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>	 63" x 126" 62.91" x 125.91"						
	6.5mm						
	3	4					
	(Arabescato, Lazio) (Onix White)						
	Polished						
Rectified							
1/8"							
<b>Testing</b>	Deep Abrasion Resistance C1243	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	1	≥250 lbf	Resistant	≤0.50%	M ≥ .60 P < .42	6	V1 - V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled content varies by color, please check website for updated information.

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



The flexibility of Expanse™ gives an elegant look to surfaces for commercial and residential interior and exterior installations. This beautiful and unique large format tile offers a seamless look to floors and walls.

**EXPANSE™**  
*Glazed & Thin Tile Porcelain*





Network Gray



Network Silver



Network Taupe



Network White



Hangar Ash



Hangar Smoke

Sizes							
	63"x126" 62.91"x125.91"		63"x126" 62.91"x125.91"				
Thickness	6mm (Network)		7mm (Hangar)				
Faces	3		2				
Finish	Matte		Matte				
Edge	Rectified		Rectified				
Grout Joint Recommendation	1/8"		1/8"				
Testing	Deep Abrasion Resistance C1243	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* 1	≥250 lbf	Resistant	≤0.50%	M ≥ .60 P < .42	6	V1 - V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled content varies by color, please check website for updated information.

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



The flexibility of Expanse™ gives an elegant look to surfaces for commercial and residential interior and exterior installations. This beautiful and unique large format tile offers a seamless look to floors and walls.

**EXPANSE™**  
*Glazed & Thin Tile Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Milan



London



Barcelona



Paris

Mosaics



Milan



London



Barcelona



Paris

Sizes							
	12"x24" 11.81"x23.62"	13"x13" Mesh 12.60"x12.60"					
Thickness	9mm	8mm					
Faces	18	N/A					
Finish	Matte	Matte					
Edge	Pressed	Cut					
Grout Joint Recommendation	3/16"	3/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	≥300 lbf	Resistant	≤0.50%	≥0.60	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Explorer™ is an artful blend of reclaimed wood and natural stone for an urban aesthetic. High-definition printing pairs wood striations with stone veining in soft, alluring neutrals.

# EXPLORER™

*Glazed Porcelain*





White



Ivory



Gray



Taupe

Mosaics



White



Ivory



Gray



Taupe

Sizes							
	12" x 24" 11.81" x 23.62"	12" x 12" Mesh 11.81" x 11.81"	3" x 12" Floor SBN				
	Thickness	10mm	10mm	10.5mm			
	Faces	18	N/A	N/A			
	Finish	Matte	Matte	Matte			
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	5/64"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	III	≥250 lbf	Resistant	≤0.50%	≥0.45	6

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.




Facade™ combines the intricate look of canvas and plaster into a beautiful glazed porcelain tile. Available in multiple colors and coordinating mosaics, this series is sure to add character to any space.

# FACADE™


*Glazed Body Match Porcelain*




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 

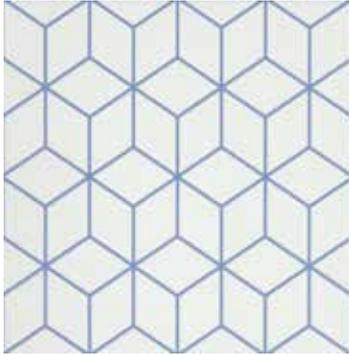

Cube Blue

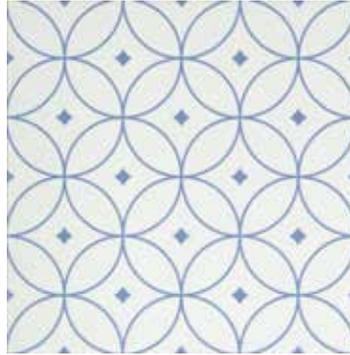

Atom Blue

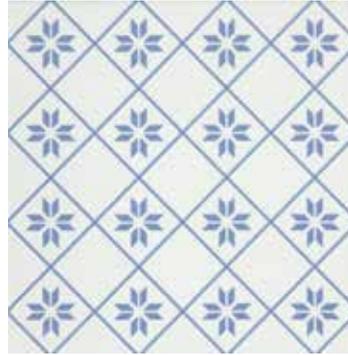

Petal Blue



Frame Navy



Cube Gray



Atom Gray



Petal Gray



Frame Gray

Sizes



10" x 10"  
9.84" x 9.84"

Thickness

8,5mm

Faces

1

Finish

Matte

Edge

Pressed

Grout Joint Recommendation

3/16"

Testing

Abrasion Resistance  
C1027

Breaking Strength  
C648

Chemical Resistance  
C650

Water Absorption  
C373

DCOF ANSI  
A1371

Scratch Hardness  
MOHS

Shade Variation  
Rating

Results\*

IV

>400 lbf

Resistant

≤0.50%

≥0.42

6

V2

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Geometry™ takes design to a whole new level. The modern, retro flare look of Geometry™ provides an element of uniqueness not found in most tiles. The raised pattern adds interest and character and will transcend any application.

# GEOMETRY™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Khafre



Menkaure



Pharaoh



Sphinx


Mosaics




Khafre



Menkaure



Pharaoh



Sphinx

Sizes							
	12"x24" 11.81"x23.62"	13"x13" Mesh 12.60"x12.60"	3"x13" Floor SBN				
Thickness	9mm	8mm	8mm				
Faces	10	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>400 lbf	Resistant	<0.50%	>0.55	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Giza™ presents the intriguing appeal of travertine in a durable glazed porcelain tile. Soft tones along with coordinating mosaics create an elegant look.

**GIZA™**  
*Glazed Porcelain*



LARGE FORMAT  FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Ash



Smoke



Coal

Mosaics



Ash



Smoke



Coal

Sizes							
	63" x 126" 62.85" x 125.79"	23" x 47" 23.46" x 47.01"	12" x 23" 11.69" x 23.46"	12" x 12" Mesh 11.69" x 11.69"	3" x 12" Floor SBN	6" x 12" Cove Base	1" x 6" Corner
Thickness	7mm	7mm	9mm	9mm	9mm		
Faces	2	10	20	N/A	N/A	N/A	N/A
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded	Pressed	Pressed
Grout Joint Recommendation	1/8"	1/8"	1/8"	5/64"	5/64"	5/64"	5/64"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	V	≥300 lbf	Resistant	>0.50%	≥0.50	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Hangar™ delivers a flexible, modern solution offered in large format and trending tile sizes. The contemporary linear look of Hangar™ adds sophistication to residential and commercial settings.

# HANGAR™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  INDOOR 



White



Cream



Silver


Mosaics



White



Cream



Silver

Sizes							
	18"x18" 17.60"x17.60"	12"x12" 12.28"x12.28"	12"x12" Mesh 12.28"x12.28"	3"x12" Floor SBN			
Thickness	8.4mm	8mm	7.3mm	8.4mm			
Faces	8	8	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>250 lbf	Resistant	>7.0%	<0.42	7	V3

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Havana™ is an elegant and understated stone-look showcasing cool and warm neutral colors in a variety of sizes and coordinating mosaics.

# HAVANA™

*Glazed Ceramic*



FLOOR / WALL

RESIDENTIAL


COMMERCIAL

INDOOR

OUTDOOR



White

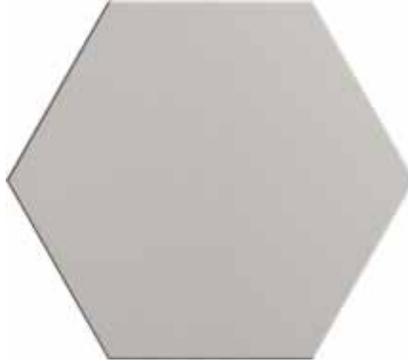

Silver



Gray



Forest



Navy



Black



Heksa™ | Gray, White, Black, Silver

<b>Sizes</b>  8" x 9" 8.13" x 9.45"								
	<b>Thickness</b>	8mm						
	<b>Faces</b>	1						
	<b>Finish</b>	Matte						
	<b>Edge</b>	Pressed						
	<b>Grout Joint Recommendation</b>	1/8"						
<b>Testing</b>	Abrasion Resistance <small>C1027</small>	Breaking Strength <small>C648</small>	Chemical Resistance <small>C650</small>	Water Absorption <small>C373</small>	DCOF ANSI <small>A1371</small>	Scratch Hardness MOHS	Shade Variation Rating	
<b>Results*</b>	III IV - Silver & White	>350 lbf	Resistant	<0.50%	>0.60	7	V1	

**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC None
- Recycled Content >30% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Heksa™ porcelain tile features the distinct and chic geometric hexagon, as timeless as it is efficient in design. The iconic honeycomb pattern adds edge when creating unique designs, versatile for any room. Heksa colors include six options, as varied as tried-and-true neutrals and a pop of color with green and navy.

# HEKSA™

*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Beige



Taupe



Oak



Blue

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 4.67" 7.83" x 4.70"						
	9mm						
	8						
	Matte						
	Rectified						
1/16"							
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	Check Website	Check Website	Resistant	Check Website	>0.65	6	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Pre & Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.




Fusing old-world glamour with contemporary rustic tones, Hollywood™ adds to the collections of distinct wood-look tile. Beige and Oak colorations recall the beautiful, classic look of aged wood, while Blue and Taupe embrace cool undertones.

# HOLLYWOOD™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 

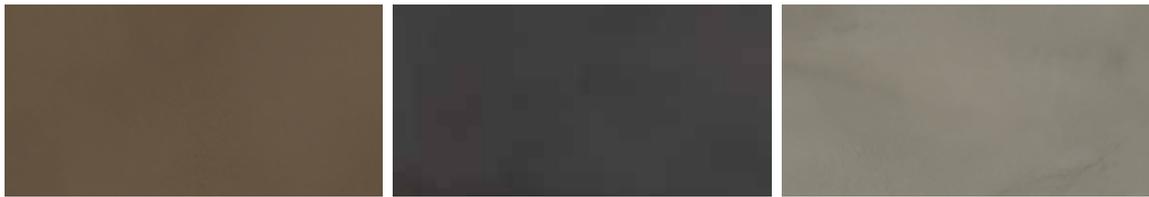

Rust Carbon Gray Silver Ivory White

Sizes							
	31" x 31" 31.38" x 31.38"	12" x 23" 11.70" x 23.48"	12" x 12" Mesh	3" x 12" Floor SBN			
Thickness	9mm	9mm	Check Website	Check Website			
Faces	18	72 36 (Ridge Pattern)	Check Website	N/A			
Finish	Matte	Matte	Check Website	Matte			
Edge	Rectified	Rectified	Check Website	Cut/Rounded			
Grout Joint Recommendation	1/8"	1/8"	Check Website	1/8"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>350 lbf	Resistant	<0.5%	>0.60 (Flat) <0.42 (Ridge)	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 9.8-39.6% Pre-Consumer and 0% Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



The striking colorways and rich movement of Ironworx™ were inspired by molten metal as it is being forged. This porcelain tile brings to life the style and sophistication of metal in an easy to maintain finish. The matching Ridge pattern adds dimension and subtle texture making Ironworx the perfect centerpiece for floors and walls.

# IRONWORX™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Canton



Rue



Maison



Ville

Sizes							
	6" x 35" 5.91" x 35.43"		6" x 24" 5.91" x 23.72"				
Thickness	9mm		9mm				
Faces	9		9				
Finish	Matte		Matte				
Edge	Pressed		Pressed				
Grout Joint Recommendation	3/16"		3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	IV	>400 lbf	Resistant	<0.5%	>0.45	7

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Larchmont™ embodies the earthy aesthetic of natural wood in a durable porcelain tile. Warm hues create an inviting atmosphere in a traditional wood plank size.

# LARCHMONT™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White



Ivory



Gray



Taupe

Mosaics



White



Ivory



Gray



Taupe

Sizes							
	12"x24" 11.81"x23.62"	12"x12" Mesh 11.81"x11.81"	3"x12" Floor SBN				
Thickness	10mm	10mm	10mm				
Faces	24	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut				
Grout Joint Recommendation	1/8"	5/64"	5/64"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	≥500 lbf	Resistant	≤0.50%	>0.50	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Inspired by the ethereal beauty of the northern lights, Latitude™ is offered in four elegant, neutral colors and coordinating mosaics.

# LATITUDE™

*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



White



Sand



Gray



Havana



Brown

Sizes Thickness Faces Finish Edge Grout Joint Recommendation							
	8" x 47" 783" x 4701"						
	9mm						
	20						
	Matte						
	Rectified						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	≥350 lbf	Resistant	≤0.50%	≥0.50	6	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 40% Pre & Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Inspired by rustic wood, Legacy™ is a glazed porcelain series available in earthy colors and a trending plank format.

# LEGACY™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Capri



Elba



Manza



Ulivo

Sizes							
	23" x 47" 23.46" x 47.01"	12" x 23" 11.69" x 23.46"	3" x 12" Floor SBN				
Thickness	9mm	9mm	9mm				
Faces	8	8	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Rectified	Rectified				
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Check Website	>250 lbf	Resistant	<0.50%	>0.60	7	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Named for the most modern city in the historic Tuscan region of Italy, the Livorno™ collection of porcelain tile evokes the beauty of watercolors with its muted palette and subtle veining. Available in two sizes, it's a perfect complement for a modern design aesthetic with its nod to urban sophistication.

# LIVORNO™

*Glazed Porcelain*





White

Dust


Moon



Gray

Taupe

Mosaics

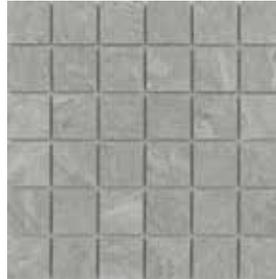

White

Dust

Moon

Taupe

Gray

Sizes							
	24"x47" 23.62"x47.24"	12"x24" 11.81"x23.62"	12"x12" Mesh 11.81"x11.81"	3"x12" Floor SBN			
Thickness	10mm	9mm	9.5mm	10mm			
Faces	5	20-24	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Rectified	Rectified	Cut	Cut/Rounded			
Grout Joint Recommendation	1/8"	1/8"	1/16"	5/64"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	≥550 lbf	Resistant	≤0.50%	≥0.60	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content >20% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Milestone™ embodies the natural elements of slate produced in glazed body match porcelain. Milestone™ is offered in versatile colors and texture variations for a natural aesthetic.

# MILESTONE™

*Glazed Body Match Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Hikari



Daku



Shiro



Gure



Oxford

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 35" 7.87" x 35.43"						
	10mm						
	9						
	Matte						
	Pressed						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	>500 lbf	Resistant	<0.50%	>0.55	8	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Mokuzai II™ captures a timber-inspired design in a porcelain tile. Through high-definition printing, vivid detail is used to achieve appealing wood tones in large format planks.

# MOKUZAI II™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Ivory



Gray



Charcoal



River Ivory



River Gray


Mosaics



Ivory



Gray

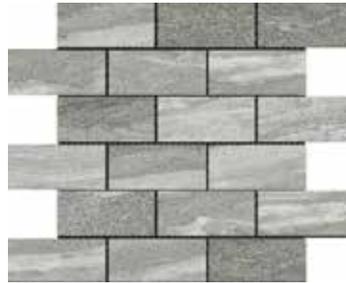

Charcoal

Sizes							
	23" x 47" 23.43" x 46.99"	12" x 23" 11.65" x 23.43"	12" x 12" Mesh	3" x 12" Floor SBN	Cove Base*	Cove Base Corner Out*	
Thickness	10mm	9mm	9mm	9mm	Check Website	Check Website	
Faces	21	84	N/A	N/A	N/A	N/A	
Finish	Matte	Matte	Matte	Matte	Matte	Matte	
Edge	Rectified	Rectified	Cut	Cut/Rounded	Cut/Rounded	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>450 lbf	Resistant	<0.50%	>0.65	9	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Pre & Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation. Please inquire for availability, may require MOQ & leadtime.



Mood™ is reminiscent of the quartzite stone from Vals, in the canton of the Grisons, Switzerland, translated into a durable porcelain tile. Offered in large scale format and trendy hues, Mood is designed for those who want to surround themselves with natural beauty.

# MOOD™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Advance



Cue



Drift

Mosaic Blend



Sizes							
	12"x24" 11.81"x23.62"	13"x13" Mesh 13.11"x13.11"	3"x12" Floor SBN	6"x13" Cove Base	1"x6" Cove Base Corner Out		
	Thickness	10mm	10mm	10mm	10mm	9mm	
	Faces	24	N/A	N/A	N/A	N/A	
	Finish	Matte	Matte	Matte	Matte	Matte	
	Edge	Pressed	Cut	Cut/Rounded	Cut/Rounded	Pressed	
Grout Joint Recommendation	1/16"	5/64"	1/8"	1/8"	1/8"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	≥600 lbf	Resistant	≤0.50%	≥0.55	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Motion™ recreates the look of veincut limestone in glazed porcelain using high-definition printing. Its striking graphic imaging makes any application a fashion statement.

**MOTION™**  
*Glazed Body Match Porcelain*



LARGE FORMAT  FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White



Silver



Gray



Taupe

Sizes							
	63" x 126" 62.85" x 125.79"	31" x 31" 31.39" x 31.39"	23" x 47" 23.46" x 47.01"	12" x 23" 11.69" x 23.46"	3" x 12" Floor SBN	6" x 13" Cove Base	1" x 6" Cove Base Corner Out
Thickness	6mm	9mm	9mm	9mm	9mm	9mm	9mm
Faces	3	24	10	30	N/A	N/A	N/A
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Rectified	Cut	Cut	Cut
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>500 lbf	Resistant	<0.50%	≥0.60	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content >40% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Network™ is a recreation of concrete with an industrial, avant-garde look. Offered in large format sizes and stunning hues, Network™ is sure to create a bold statement.

# NETWORK™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Bay



Harbor



Ferry



Pier

Mosaics




Bay




Harbor



Ferry



Pier

Sizes							
	12" x 24" 12.20" x 24.02"	12" x 12" Mesh	3" x 12" Floor SBN				
Thickness	9mm	9.5mm	9.5mm				
Faces	16	N/A	N/A				
Finish	Matte, Lappato	Matte	Matte				
Edge	Rectified	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	>400 lbf	Resistant	<0.50%	>0.65	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes


- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Pre & Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Newport™ artfully blends the look of marble and concrete, creating a notable design aesthetic. Cool undertones highlight the trending industrial look of spaces.

# NEWPORT™

*Glazed Porcelain*

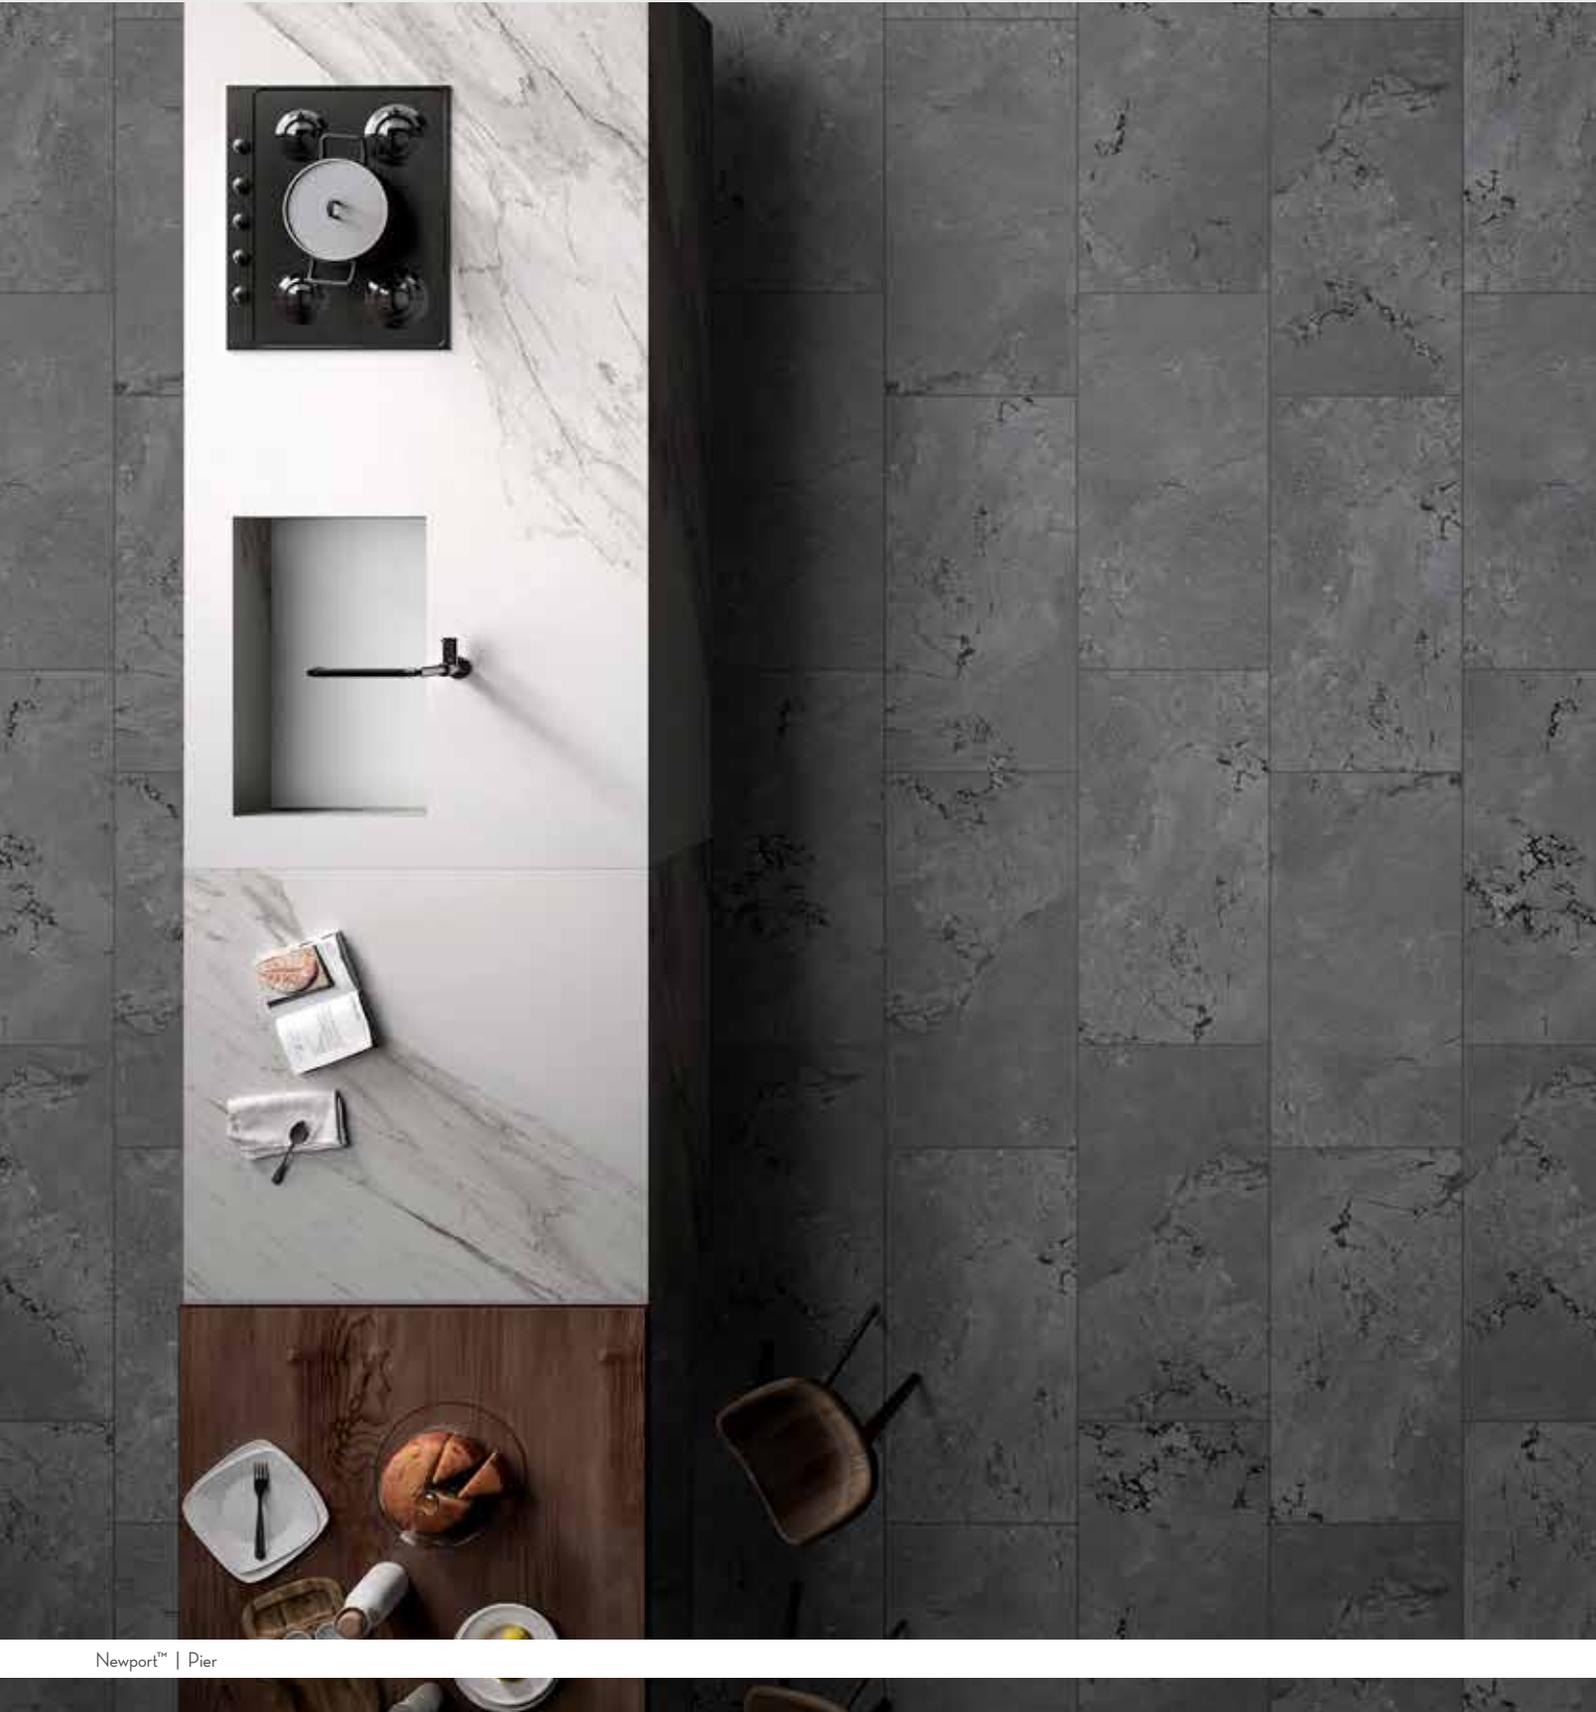

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Legend



Novel




Epic



Saga

<b>Sizes</b>  18" x 18" 17.72" x 17.72"								
	<b>Thickness</b>	10.5mm						
	<b>Faces</b>	4						
	<b>Finish</b>	Matte						
	<b>Edge</b>	Pressed						
	<b>Grout Joint Recommendation</b>	1/16"						
<b>Testing</b>	Abrasion Resistance <small>C1027</small>	Breaking Strength <small>C648</small>	Chemical Resistance <small>C650</small>	Water Absorption <small>C373</small>	DCOF ANSI <small>A1371</small>	Scratch Hardness MOHS	Shade Variation Rating	
<b>Results*</b>	IV	>375 lbf	Resistant	3.0 - 7.0%	>0.42	6	V2	

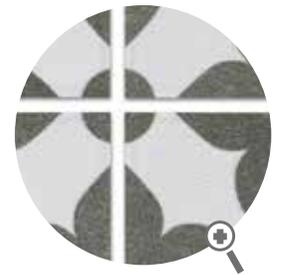

Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 7-10% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

A traditional look takes on a modern flare with Nostalgia™. The design harkens back to when skilled artisans hand painted tiles. The 18"x18" pre-scored size combines old world craftsmanship with modern technology providing an easy-to-install designer look.

# NOSTALGIA™

*Glazed Ceramic*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



White



Gray



Blue

Mosaics




White



Gray



Blue

Sizes							
	12" x 24" 11.81" x 23.62"	12" x 12" Mesh 11.81" x 11.81"	3" x 24" Floor SBN				
Thickness	8.5mm	8.5mm	8.5mm				
Faces	18	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥350 lbf	Resistant	≤0.50%	>0.50	5	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Offered in soothing, cool tones, Nova™ recreates the classic look of natural stone in a glazed porcelain tile. The soft veining and tonal variation creates depth and textural interest in any application.

**NOVA™**  
*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Dawn



Sunrise



Evening

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 47" 787 x 47.24"						
	10mm						
	10						
	Matte						
	Rectified						
3/16"							
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	≥750 lbf	Resistant	≤0.50%	≥0.60	8	V4

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Orchard™ offers the beautiful timeless look of hardwood in stylish colors with the added benefits of porcelain. The graphic details of the warm, earthy colors achieve realistic wood textures in a modish plank size.

# ORCHARD™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Bianco



Tortora



Grigio



Antracite

Sizes							
	24" x 47" 23.62" x 47.24"	12" x 24" 11.81" x 23.62"	3" x 12" Floor SBN				
Thickness	10mm	9.5mm	9.5mm				
Faces	8	32	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Rectified	Cut/Rounded				
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* III - V	>625 lbf	Resistant	<0.50%	>0.42	6	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 20% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Outpost™ is a contemporary stone look featuring harmonious variations in hues ideal for any space. The industrial look of stone is combined with warm earthy colors to create the ideal aesthetic.

# OUTPOST™


*Glazed Body Match Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 



Astral

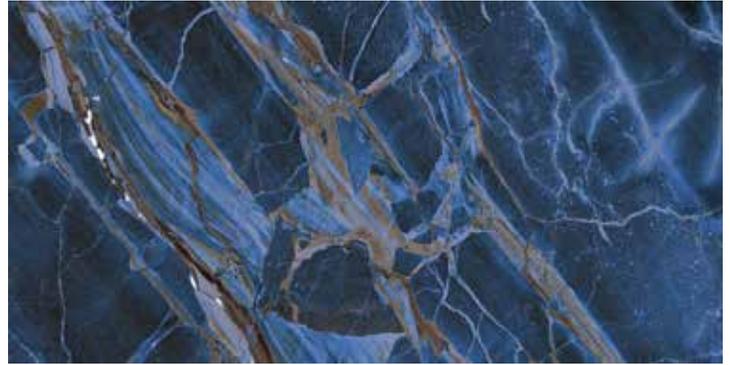

Blue



Brown



White

Polished Not Recommended for Use as Commercial Wet Area Flooring or Outdoor Flooring

Sizes							
	24" x 47" 23.46" x 47.05"		12" x 24" 11.69" x 23.46"				
Thickness	7mm		7mm				
Faces	Brown & White: 8 Blue & Astral: 9		Brown & White: 32 Blue & Astral: 36				
Finish	Polished		Matte & Polished				
Edge	Rectified		Rectified				
Grout Joint Recommendation	1/8"		1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Matte: V (Ast./Wht.) II (Blu./Brn.) Polished: II	>350 lbf	Resistant	<0.50%	>0.60 (Matte) <0.42 (Polished)	6 (Matte) 4 (Polished)	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Inspired by the world's finest marbles, Parkview™ offers traditional marble looks with classic whites and the deepest blacks as well as unconventional marbles with its deep, rich cobalt blue. Each unique tile is enhanced by contrasting veining and striking golds. The thin 7mm thickness makes installation a breeze.

# PARKVIEW™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Annata



Dolce



Secco



Talento


Mosaics



Annata



Dolce



Secco



Talento

Sizes							
	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh 11.81" x 11.81"	3" x 12" Floor SBN			
Thickness	10.5mm	10mm	8.5mm	10mm			
Faces	8	11	N/A	20			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>400 lbf	Resistant	<0.50%	>0.42	6	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Looking for a design moment? Look no further than Pienza™. Named after a glorious Tuscan town, the collection delivers a sophisticated look for the home. Four neutral colorways offer depth, texture and unique looks.

# PIENZA™

*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Smoke



Oak



Gray

Sizes							
	6" x 36" 5.91" x 35.43"		6" x 24" 5.91" x 23.62"				
Thickness	10mm		10.5mm				
Faces	20		20				
Finish	Matte		Matte				
Edge	Pressed		Pressed				
Grout Joint Recommendation	3/16"		3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	IV	≥300 lbf	Resistant	≤0.50%	≥0.60	7

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Pocono™ mimics the unique gradations and variances found in natural wood. This series is offered in sizes inspired by natural wood flooring and durable glazed porcelain.

**POCONO™**  
*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Moon



Midnight



Caramel



Coffee

Sizes							
	12" x 47" 11.61" x 47.24"	8" x 47" 7.68" x 47.24"	6" x 47" 5.71" x 47.24"				
Thickness	11.3mm	11.3mm	11.3mm				
Faces	20	30	40				
Finish	Matte	Matte	Matte				
Edge	Rectified	Rectified	Rectified				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥250 lbf	Resistant	≤0.50%	>0.60	6	V4

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Porch™ features subtle wood grain movement that flows across tile panels. Caramel and coffee inspired tones invite color variation on interior and exterior floors. An understated matte finish completes the glazed porcelain tile for enhanced visual depth.

# PORCH™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White



Ivory



Fawn




Charcoal

Mosaics



White




Ivory



Fawn



Charcoal

Sizes							
	32" x 32" 31.50" x 31.50"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	3" x 12" Floor SBN		
Thickness	10mm	9mm	9mm	9mm	9mm		
Faces	8	8	10	N/A	N/A		
Finish	Matte & Polished	Matte & Polished	Matte & Polished	Matte	Matte & Polished		
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>550 lbf	Resistant	<0.50%	>0.50 (Matte) <0.42 (Polished)	7 (Matte) 6 (Polished)	V3

Polished not recommended for use as commercial or outdoor flooring.

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Porto II™ is inspired by the simplistic look of concrete and stone in large format sizes and a range of colors. Available in matte or polished, Porto II is ideal for both residential and commercial spaces.

# PORTO II™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Ivory



Dove



Fawn




Gray

Mosaics



Ivory



Dove



Fawn



Gray

Sizes							
	18" x 18" 17.72" x 17.72"	13" x 13" 12.99" x 12.99"	12" x 24" 11.75" x 23.62"	13" x 13" Mesh 12.60" x 12.60"	3" x 13" Floor SBN		
Thickness	8.8mm	7.8mm	9.8mm	8.3mm	8.3mm		
Faces	7	13	9	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut/Rounded		
Grout Joint Recommendation	1/8"	1/8"	1/8"	5/32"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥350 lbf	Resistant	≤0.50%	≥0.70	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Potenza™ embodies the earthy aesthetic of travertine in a durable porcelain tile. The linear brushed look creates a harmonious flow in a variety of colors.

POTENZA™  
*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Assembly



District




Domain




Nation

Mosaics




Assembly



District



Domain



Nation

Sizes							
	18" x 18" 17.72" x 17.72"	13" x 13" 12.99" x 12.99"	12" x 24" 11.81" x 23.62"	13" x 13" Mesh	3" x 13" Floor SBN		
Thickness	8.8mm	7.2mm	9.8mm	8mm	8mm		
Faces	11	11	10	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* IV	>350 lbf	Resistant	<0.50%	>0.50	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Realm II™ mirrors traditional honed marble with subtle veining and refined movement. Sophisticated colors with crackled and distressed details lend a natural aesthetic. A matte finish and various tile sizes make Realm II™ ideal for numerous interiors.

# REALM II™

*Glazed Porcelain*





Court



Lane




Patio



Wynd

<b>Sizes</b>  18" x 18" 17.72" x 17.72"							
	<b>Thickness</b>	10.5mm					
	<b>Faces</b>	1					
	<b>Finish</b>	Matte					
	<b>Edge</b>	Pressed					
<b>Grout Joint Recommendation</b>	1/16"						
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	>375 lbf	Resistant	3.0% - 7.0%	>0.42	6	V1

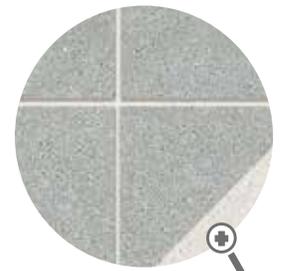

Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 7-10% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Celebrating classic patterns of the past with a modern twist - that's the beauty of Reminisce™. The collection offers an eclectic group of designs, providing a wide array of solutions for any space. A kaleidoscope of shapes and color delivers a statement that stands the test of time.

# REMINISCE™

*Glazed Ceramic*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Alto



Manu



Pampa



Tumbes

Mosaics



Alto




Manu



Pampa



Tumbes

Sizes							
	13" x 13" 12.99" x 12.99"	12" x 24" 11.81" x 23.62"	13" x 13" Mesh	3" x 13" Floor SBN			
Thickness	7.8mm	9mm	9mm	7.5mm			
Faces	47	37	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥400 lbf	Resistant	≤0.50%	≥0.56	7	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Showcasing the complex veining of rare marble, Reserva™ brings to life the timeless look with multiple sizes and stunning colors.

# RESERVA™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 



White



Diagonal



Spade



Black



Floral



Argyle



Pattern Suggestions

Sizes Thickness Faces Finish Edge Grout Joint Recommendation							
	13"x13" 12.99"x12.99"						
	10mm						
	1						
	Matte						
	Pressed						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	III	>400 lbf	Resistant	<0.50%	>0.60	6



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

With Rhapsody®, the design possibilities are endless. Create a classic black and white checkered pattern or utilize any combination of the solids and patterns to create your own masterpiece. The alluring distressed finish makes a statement in any room.

# RHAPSODY®

*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



White Hex Pattern



Black Hex Pattern




Silver Hex Pattern



White Hex



Black Hex

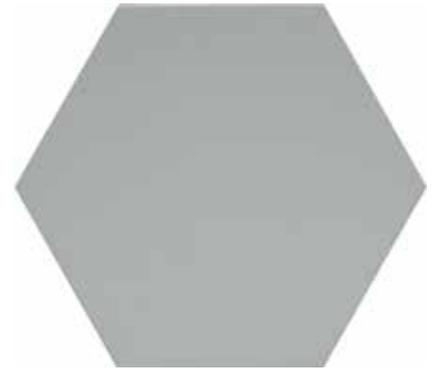

Silver Hex

Pattern tiles not recommended for floor applications.

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	9mm						
	1						
	Matte						
	Pressed						
1/8"							
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	>275 lbf	Resistant	<0.50%	>0.42 (Solid) <0.42 (Pattern)	6	V1

**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Rhythm™ creates a stunning look in your space with its geometric shape and unique design detail. Available in Black, White, and Silver and in solid or pattern designs, Rhythm brings new life to the traditional hex. Combine pattern tiles with solid and create a truly memorable, and design inspired look.

# RHYTHM™

*Glazed Porcelain*





Taupe



Brown

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	9" x 36" 8.96" x 36.02"						
	9.2mm						
	6						
	Matte						
	Pressed						
<b>Testing</b>	Abrasion Resistance <small>C1027</small>	Breaking Strength <small>C648</small>	Chemical Resistance <small>C650</small>	Water Absorption <small>C373</small>	DCOF ANSI <small>A1371</small>	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	>250 lbf	Resistant	<0.50%	>0.42	Check Website	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 40% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Sanctuary II™ reflects the simplistic beauty of natural wood grains in a durable glazed porcelain tile. Warm neutrals with rustic undertones bring a quiet elegance for an inviting retreat. Subtle visual and tactile textures elongate surfaces for a versatile, sophisticated linear design.

# SANCTUARY II™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Gobi



Kalahari



Mojave




Sahara


Mosaics




Gobi



Kalahari



Mojave



Sahara

Sizes							
	12"x24" 11.81"x23.62"	13"x13" Mesh 13.07"x13.07"	3"x12" Floor SBN				
	Thickness	9.8mm	9.8mm	9.5mm			
	Faces	16	N/A	N/A			
	Finish	Matte	Matte	Matte			
Edge	Pressed	Cut	Cut Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	III	≥300 lbf	Resistant	≤0.50%	≥0.50	7

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Sandstorm™ reflects the captivating layers of sandstone in a glazed porcelain tile. High-definition printing enables natural-looking color variation, veining and fissure lines for which natural stone is known.

# SANDSTORM™


*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 



Bianco

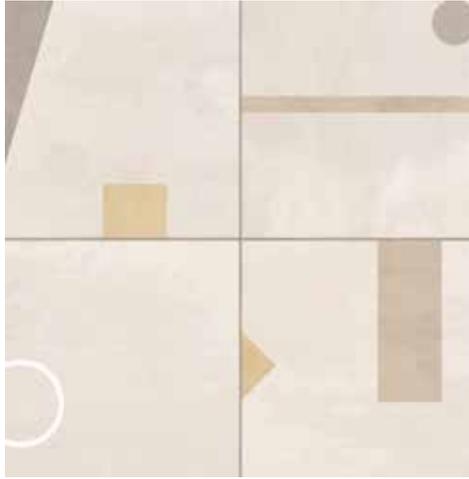

Bianco Fashion



Natural



Shard



Flair

<b>Sizes</b>  18"x18" 17.72"x17.72"							
	<b>Thickness</b>	10.5mm					
	<b>Faces</b>	10					
	<b>Finish</b>	Matte					
	<b>Edge</b>	Pressed					
<b>Grout Joint Recommendation</b>	1/16"						
<b>Testing</b>	Abrasion Resistance <small>C1027</small>	Breaking Strength <small>C648</small>	Chemical Resistance <small>C650</small>	Water Absorption <small>C373</small>	DCOF ANSI <small>A1371</small>	Scratch Hardness <small>MOHS</small>	Shade Variation Rating
<b>Results*</b>	III	>350 lbf	Resistant	<0.5%	>0.60	5	V2



Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 7-10% Pre-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Design that comes alive - meet Señora™. The elegant Spanish styling marries perfectly with modern design providing a sophisticated look. The subtle colorways pay homage to Spanish style architecture and brings a touch of warmth to any space.

# SEÑORA™

*Glazed Ceramic*



FLOOR / WALL

RESIDENTIAL

INDOOR



Luna



Mila



Zara

Sizes							
	31" x 31" 31.30" x 31.30"	24" x 47" 23.50" x 47.09"	12" x 24" Matte 11.81" x 23.62"	12" x 24" Polished 11.69" x 23.50"			
Thickness	10mm	9mm	8mm	8mm			
Faces	4	4	12	12			
Finish	Matte & Polished	Matte & Polished	Matte	Polished			
Edge	Rectified	Rectified	Pressed	Rectified			
Grout Joint Recommendation	1/8"	1/8"	3/16"	1/8"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Want to give your next design project a look of modern elegance? Serendra™ porcelain marble look tile provides a cool, rich and distinguished look that never goes out of style and is easy to maintain. The variations in each tile contribute to its distinctive appeal. Serendra comes in three colors and three sizes.

# SERENDRA™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Contour



Figure




Profile



Shadow

Mosaics



Contour



Figure



Profile



Shadow

Sizes							
	12"x24" 11.81"x23.62"	13"x13" Mesh	3"x12" Floor SBN				
Thickness	9.8mm	9.8mm	9.7mm				
Faces	6	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥700 lbf	Not Resistant	≤0.50%	≥0.55	6	V3

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Inspired by the artistic blend of watercolors, Silhouette™ strides in with soft tones and linear flow creating an inviting environment.

# SILHOUETTE™

*Glazed Porcelain*

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Asphalt



Henna




Dove



Ivory



Gray

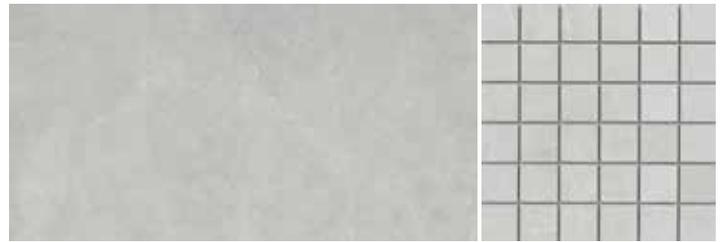

Silver



White

Sizes							
	24"x24" 23.62"x23.62"	24"x47" 23.62"x47.24"	12"x24" 11.81"x23.62"	6"x12" 5.83"x11.81"	9"x10"	13"x13" Mesh 12.60"x12.60"	3"x12" Floor SBN
Thickness	9.3mm	10.2mm	8.4mm	8.4mm	8mm	9mm	8.4mm
Faces	12	6	12	12	Check Website	N/A	N/A
Finish	Matte & Polished	Matte & Polished	Matte & Polished	Polished	Matte	Matte	Matte & Polished
Edge	Rectified	Rectified	Rectified	Rectified	Check Website	Cut	Cut/Round
Grout Joint Recommendation	1/8"	1/8"	1/8"	3/64"	Check Website	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>345 lbf	Resistant	<0.50%	>0.55 (Matte) <0.42 (Polished)	7 (Matte) 3 (Polished)	V2 V3 (6"x12")

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.


Sterlina™ beautifully unifies the look of timeless marble with the urban touch of concrete. Available in matte and polished finish and seven colorways to achieve any desired look.

# STERLINA™

*Glazed Porcelain*





FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Pure White

Mosaics

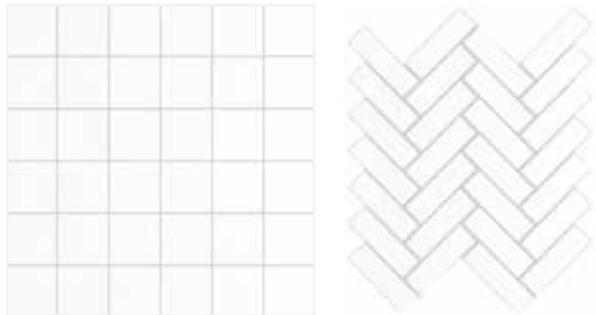

							
<b>Sizes</b>	32" x 32" 31.50" x 31.50"	24" x 47" 23.62" x 47.24"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	12" x 12" Mesh	3" x 12" Floor SBN
<b>Thickness</b>	9.5mm	9.5mm	9.5mm	9.5mm	9.4mm	9.4mm	9.5mm
<b>Faces</b>	1	1	1	1	N/A	N/A	1
<b>Finish</b>	Polished	Polished	Matte & Polished	Matte & Polished	Matte	Polished	Matte & Polished
<b>Edge</b>	Rectified	Rectified	Rectified	Rectified	Cut	Cut	Cut/Rounded
<b>Grout Joint Recommendation</b>	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV (Matte) III (Polished)	>400 lbf	Resistant	<0.50%	>0.55 (Matte) <0.42 (Polished)	7 (Matte) 5 (Polished)	V1

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Cool and clean, Style II™ offers multiple sizes and a linear mosaic for a contemporary installation perfect for any application.

## STYLE II™

*Glazed Porcelain*





Alps



Vadret

Sizes							
	24" x 24" 23.62" x 23.62"	12" x 24" 11.61" x 23.62"	3" x 12" Floor SBN				
Thickness	8.2mm	8.2mm	9mm				
Faces	6	20	N/A				
Finish	Polished	Polished	Polished				
Edge	Rectified	Rectified	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>350 lbf	Resistant	<0.50%	<0.42	3	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Recreate the elegant look of marble and stone and add a touch of elegance and natural beauty to any space.

SWEDEN™  
*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Rhone

Mosaics



Sizes							
	32" x 32" 31.50" x 31.50"	24" x 47" 23.62" x 47.24"	12" x 23" (M) 11.81" x 23.62"	11" x 23" (P) 11.22" x 23.43"	12" x 12" Mesh 12.01" x 12.01"	3" x 12" Floor SBN	
Thickness	10mm	10mm	10mm	10mm	10mm	10mm	
Faces	20	20	20	20	N/A	N/A	
Finish	Polished	Polished	Matte	Polished	Matte & Polished	Matte & Polished	
Edge	Rectified	Rectified	Rectified	Rectified	Cut	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV (Matte) III (Polished)	>700 lbf	Resistant	<0.50%	>0.65 (Matte) <0.42 (Polished)	6 (Matte) 5 (Polished)	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0% Pre- & Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Swiss II™ radiates sophisticated beauty highlighting the soft veining of natural stone in a porcelain tile. With polished and matte finishes in multiple sizes, the design possibilities are limitless.

## SWISS II™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Bianco



Ivory



Dove



Carbon

Mosaics



Bianco




Ivory



Dove



Carbon

Sizes							
	12" x 24" 12.2" x 24.02"	12" x 12" Mesh	3" x 12" Floor SBN				
Thickness	9mm	9.5mm	9mm				
Faces	16	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	IV	>375 lbf	Resistant	<0.50%	>0.65	7

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Technique™ showcases the intricate veining in natural stone. Offered in contemporary colors it will add charm to any installation.

# TECHNIQUE™

*Glazed Porcelain*





Bianco



Gesso



Palladio



Nero

Sizes							
	24" x 24" 23.62" x 23.62"	12" x 24" 12.2" x 24.02"	3" x 24" Floor SBN				
Thickness	10mm	10mm	10mm				
Faces	8	16	N/A				
Finish	Polished	Matte	Matte & Polished				
Edge	Pressed	Rectified	Cut/Rounded				
Grout Joint Recommendation	3/16"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥250 lbf	Resistant	≤0.50%	≥0.42	6	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Terazio™ is an alluring recreation of quartz-like attributes in a durable porcelain tile. High-definition inkjets create natural speckled variations on the surface in neutral earth tones. Terazio provides a smooth, luminous finish for residential and commercial applications.

# TERAZIO™


*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 




Silver

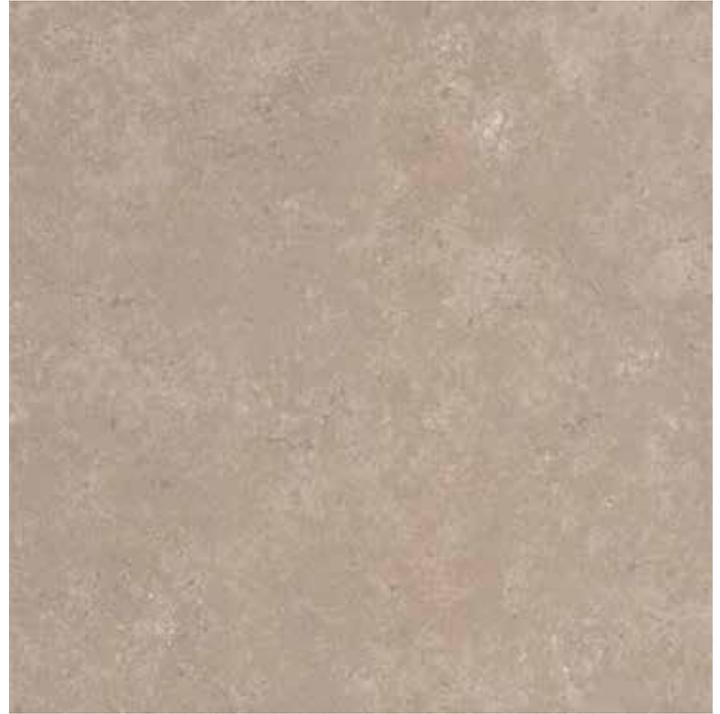

Taupe

Mosaics



Silver



Taupe

Sizes							
	18" x 18" 17.60" x 17.60"	12" x 12" 12.28" x 12.28"	12" x 12" Mesh 12.28" x 12.28"	3" x 12" Floor SBN			
Thickness	8.4mm	8mm	8mm	7mm			
Faces	8	8	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	≥250 lbf	Not Resistant	≤0.50%	>7.0%	7	V2

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Tesola™ presents the subtle look of concrete in soft neutral colors. This fast trending look is offered in two sizes and coordinating mosaics.

# TESOLA™

*Glazed Ceramic*

FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Gray



Taupe



Brown

Sizes



8" x 45"  
7.89" x 44.88"

Thickness

10.5mm

Faces

12

Finish

Matte

Edge

Rectified

Grout Joint Recommendation

3/16"

Testing

Abrasion Resistance  
C1027

Breaking Strength  
C648

Chemical Resistance  
C650

Water Absorption  
C373

DCOF ANSI  
A1371

Scratch Hardness  
MOHS

Shade Variation  
Rating

Results\*

IV

≥700 lbf

Resistant

≤0.50%

≥0.55

6

V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Theory™ is a glazed porcelain series inspired by the look of distressed wood, adding interest to any floor or wall application.

# THEORY™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



White



Oyster



Silver



Twilight


Mosaics



White




Oyster



Silver



Twilight

Sizes							
	12" x 24"	12" x 12" Mesh 11.81" x 11.81"	3" x 12" Floor SBN				
Thickness	9mm	9mm	9mm				
Faces	1	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Cut	Cut/Rounded				
Grout Joint Recommendation	1/8"	Check Website	Check Website				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>325 lbf	Resistant	<0.50%	>0.42	7	V1

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- 0% Pre- & Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Inspired by woven textiles, Thread II™ offers a subtle color palette with coordinating mosaics.

# THREAD II™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  INDOOR 



Beige




Silver




Noce

Mosaics

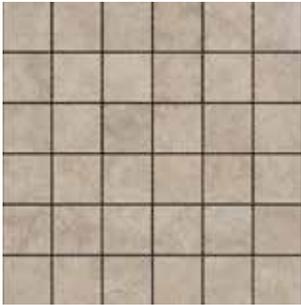

Beige

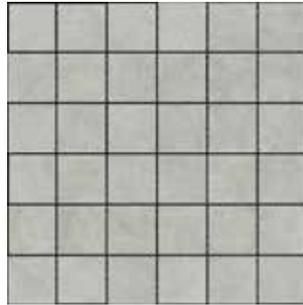

Silver



Noce

Sizes							
	17" x 17" 17,30" x 17,30"	13" x 13" 13,10" x 13,10"	13" x 13" Mesh 12,99" x 12,99"	3" x 13" Floor SBN			
Thickness	9mm	7,7mm	9mm	7,7mm			
Faces	4	4	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	1/8"	1/8"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* III	≥250 lbf	Non-Resistant	≤5%	≥0.42%	7	V2

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

With subtle veining and rich earthy colors, Toledo™, a glazed ceramic tile series, recalls age old stone in traditional sizes and colors.

# TOLEDO™

*Glazed Ceramic*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 



White



Almond



Steel



Ocean



Taupe

Sizes							
	12" x 35" 11.71" x 35.3"	12" x 24" 11.71" x 23.50"	3" x 12" Floor SBN				
Thickness	8mm	9.5mm	Check Website				
Faces	8	32	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Rectified	Cut/Rounded				
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results*	II	>350 lbf	Resistant	<0.50%	>0.60	7

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free



\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Trendz™ takes fashion to a new level by combining sophisticated colors with subtle shimmer. The result is undeniably beautiful. From the cool ocean blue to the contemporary steel gray, Trendz is sure to have a look to match any decor. Available in two sizes including a large 12x35 plank and is ideal for any room where a twist on traditional looks is desired.

# TRENDZ™

*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Album



Diary





Journal



Ledger

Mosaics



Album

Diary

Journal

Ledger

Sizes							
	21" x 21" 21.38" x 21.38"	13" x 13" 13.07" x 13.07"	12" x 24" 12.2" x 24.02"	13" x 13" Mesh	3" x 13" Floor SBN		
Thickness	8.5mm	8mm	8.5mm	8.5mm	8mm		
Faces	8	16	16	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut/Rounded		
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	>380 lbf	Resistant	<0.50%	>0.55	7	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Trovata II™ beautifully recreates the look of stone in glazed porcelain with rustic undertones. Using high definition printing technology, Trovata II™ consists of four colors and coordinating mosaics.

## TROVATA II™

*Glazed Porcelain*





Kyoto



Osaka



Tokyo

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	8" x 24" 795" x 2370"						
	8.6mm						
	8						
	Matte						
	Pressed						
<b>Testing</b>	Abrasion Resistance <small>C1027</small>	Breaking Strength <small>C648</small>	Chemical Resistance <small>C650</small>	Water Absorption <small>C373</small>	DCOF ANSI <small>A1371</small>	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	III	>250 lbf	Resistant	<10.0%	>0.45	7	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Uddo™ represents the look of wood in a glazed ceramic tile evoking layers of texture and natural graining. The warm, neutral tones will enhance the beauty of any space.

**UDDO™**  
*Glazed Ceramic*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



Sugar Hill



Manhattan



Morningside



Hamilton



Hudson



Washington

Mosaics



Sugar Hill



Manhattan




Morningside



Hamilton



Hudson



Washington

Sizes							
	24"x47" 24.02"x47.24"	24"x24" 24.02"x24.02"	12"x24" 12.2"x24.02"	12"x12" Mesh 11.81"x11.81"	3"x12" Floor SBN		
Thickness	10mm	9mm	9.5mm	10mm	9.5mm		
Faces	6	20	24	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded		
Grout Joint Recommendation	1/8"	1/8"	1/8"	5/64"	5/64"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	IV	≥850 lbf	Resistant	≤0.50%	≥0.65	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free



\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Uptown™ features subtle textures and color variation giving it a timeless, urban feel. All colors are offered in a coordinating mosaic for a variety of installation options.

# UPTOWN™

*Glazed Body Match Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Groven



Ribia



Varzo

Sizes							
	24" x 47" 23.62" x 47.24"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	3" x 12" Floor SBN			
Thickness	12mm	10mm (Matte) 9.5mm (Polished)	9mm (Matte) 9.2mm (Polished)	Check Website			
Faces	6	10	12-17	N/A			
Finish	Matte & Polished	Matte & Polished	Matte & Polished				
Edge	Rectified	Rectified	Rectified	Cut/Rounded			
Grout Joint Recommendation	1/8"	1/8"	1/8"	Check Website			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V3

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content >40% Pre-Consumer, >10% Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.



Vara™ takes its inspiration from the natural beauty of marble. This stunning line evokes the luxurious look of natural stone but with the easy care of porcelain tile. The subtle veining and crisp coloring creates a stylish environment.

**VARA™**  
*Glazed Porcelain*




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR 



Force



Rate

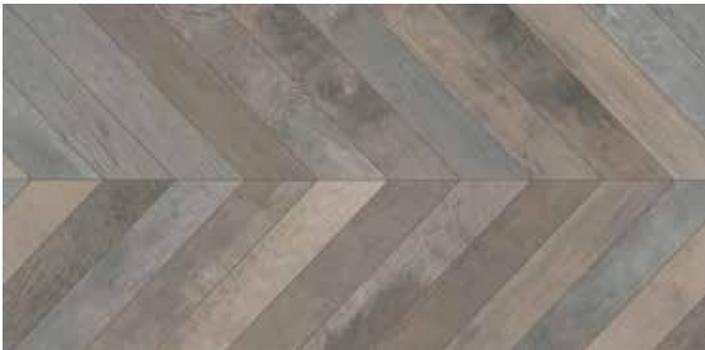

Pulse

<b>Sizes</b>  <b>Thickness</b>  <b>Faces</b>  <b>Finish</b>  <b>Edge</b>  <b>Grout Joint Recommendation</b>							
	17" x 35" 17.40" x 35.04"						
	11mm						
	3						
	Matte						
Rectified							
1/16"							
<b>Testing</b>	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	≥650 lbf	Resistant	<0.50%	>0.55	9	V2

**Product and Installation Details | ANSI A108.02**  
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Velocity™ uniquely displays the varied colors and textures of distressed wood. A popular chevron pairs natural and painted wood tones for rustic, yet modern appeal. Plank tiles invite creative layouts for geometric designs that play on patterns.

## VELOCITY™

*Glazed Porcelain*



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Gray



Latte

Sizes



8" x 47"  
7.87" x 47.24"

Thickness

8mm

Faces

16

Finish

Matte

Edge

Pressed

Grout Joint Recommendation

3/16"

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.

Testing

Abrasion Resistance  
C1027

Breaking Strength  
C648

Chemical Resistance  
C650

Water Absorption  
C373

DCOF ANSI  
A1371

Scratch Hardness  
MOHS

Shade Variation  
Rating

Results\*

IV

526 lbf

Resistant

0.40%

Check Website

7

V3



Recommended 33% Offset\*

**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Quietly sophisticated with all the inherent benefits of tile, that's the story behind Victus™. Natural wood looks add warmth and comfort, whether your style leans more modern and minimal or traditional and timeless.

**VICTUS™**  
*Glazed Porcelain*



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR 



White



Ivory



Gray



<b>Sizes</b>		
	18" x 18" 16.50" x 17.30"	
<b>Thickness</b>	9mm	
<b>Faces</b>	4	
<b>Finish</b>	Matte	
<b>Edge</b>	Pressed	
<b>Grout Joint Recommendation</b>	1/8"	

Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
<b>Results*</b>	IV	≥400 lbf	Resistant	<0.50%	≥0.60	9	V2

 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Virtue™ features interlocking tiles that seamlessly connect for a consistent hexagon shape. Its eclectic mix of ornate patterns and smooth textures add an accent pop, or bold, all-over patterning. An octagonal shape blends the craftsmanship of a mosaic with the ease of larger-format tiles.

## VIRTUE™

*Glazed Porcelain*



FLOOR / WALL 

RESIDENTIAL 

COMMERCIAL 

INDOOR 

OUTDOOR 

POOL 



Trav Silver



Trav Beige



Cemento Gray

Sizes							
	24" x 24" 23.62" x 23.62"	12" x 24" Coping					
Thickness	20mm	20mm					
Faces	12 (Travertine) 8 (Cemento)	24 (Travertine) 16 (Cemento)					
Finish	Matte	Matte					
Edge	Rectified	Rectified					
Grout Joint Recommendation	1/8"	3/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	Results* V	≥500 lbf	Resistant	≤0.50%	>0.65	7	V2

**Product and Installation Details | ANSI A108.02**  
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

Xtra™ replicates the look of concrete and stone in multiple colors. This unique collection is suitable for indoor and outdoor spaces.

**XTRA™**  
*Glazed Porcelain*

